

Project Name:
Part Number:
Fixture Type
Notes:

WPL LED Tunable Wall Pack Light

APPLICATIONS

The Tunable Wall Pack Gen 2 offers maximum light output for general purpose areas and security lighting in a classic design. The luminaire efficiently delivers lumens and consumes less energy than traditional wall mount technologies. Security Lighting, Perimeter Lighting, Building Entrances, Walkways, electronic processing workshops, storage warehouses, steel mills, gas stations, toll booths, waiting rooms, the platforms of the railway stations, indoor stadiums, etc.



DLC Listed

This product is on the DESIGN Lights Consortium (DLC Premium 5.1) Qualified Products List and is eligible for rebates from DLC Member Utilities.

Wall Pack Light 50W / 75W / 100W



ETL Listing

Suitable for wet locations

Replacement

Replaces 100W MH - 250W MH

ORDERING INFORMATION



EXAMPLE: WPL 50 4K BZ UNV

Series	Wattage	CCT Selectable	Finish	Voltage	Options
WPL	50 - 50W	3K 3000K	BZ Dark Bronze RP* Custom Color	UNV	Blank = No Accessories PCT M = 120 - 277V only JL-413C Mini Photocell BLD-CM8N = 8W Emergency Backup Battery 120-277V only BLD-CM15N = 15W Emergency Backup Battery 120-277V only BLD-CM20N = 20W Emergency Backup Battery 120-277V only
	75 - 75W	4K 4000K		120-277V	
	100 - 100W	5K 5000K		HVU* 347-480V	

*480V is only for 100W Wall Pack lights.

Accessories & Options



BLD-CM8N



BLD-CM15N



BLD-CM20N



PCT M

Houston, Texas

Sales@orelighting.com

346-874-7955

www.orelighting.com

Note: Information contained herein is subject to change without notice.

©2023 ORE Lighting INC. All rights reserved

ORE LIGHTING

SPECIFICATIONS

DRIVER

One Driver, Constant Current, Class I, 120-277V, 480V, 50-60Hz, Power Factor 98%, IP67

ELECTRICAL

High quality constant-current drivers >90% efficiency and rated for 50/60Hz operation with Standard 120-277V input.

LIFESPAN

100,000 – hour LED lifespan based on IES LM-80 results and TM-21 calculations.

LED

Multi-chip, high-output, long-life, LUMILEDS 5050 LED Chips

CCT SELECTABLE

3000K (Warm)
4000k (Neutral)
5000K (Cool)

EFFICACY

Up to 130 lumens per watt

COLOR UNIFORMITY

ORE's range of CCT (Correlated Color Temperature) follows the Chromaticity of Solid-State Lighting (SSL) Products

AMBINET TEMPERATURE

Suitable for use in -40°F to 131°F (-40°C to 55°C)

HOUSING

One piece die-cast aluminum housing with integral heat-sink fins

IP RATING

Ingress Protection rating of IP66 for dust and water

FINISH

Formulated for high-durability and long-lasting color Polyester Powder Dark Bronze coat



GREEN TECHNOLOGY

Mercury and UV-free. RoHS compliant components. Polyester powder coat finish formulated without the use of VOCs or toxic heavy metals

WARRANTY

5 year limited warranty. Comprehensive warranty terms can be located on www.orelighting.com

DIMENSIONS

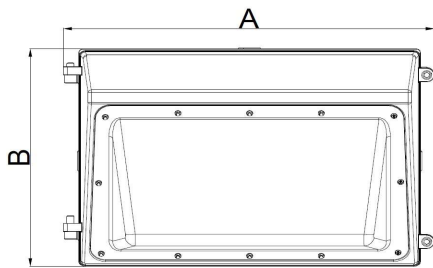

Product	A	B	C	D
WPL 50W	14.30"	9.30"	2.10"	7.72"
WPL 75W	14.30"	9.30"	2.10"	7.72"
WPL 100W	14.30"	9.30"	2.10"	7.72"

Weight: 7.70 lbs

Houston, Texas

Sales@orelighting.com

346-874-7955

www.orelighting.com

Note: Information contained herein is subject to change without notice.

©2023 ORE Lighting INC. All rights reserved

ORE LIGHTING

PERFORMANCE DATA

PART NUMBER	WATTAGE	LPW	3000K	4000K	5000K
			LUMENS	LUMENS	LUMENS
WPL50	50W	132 lm/w	6,503	6,505	6,509
WPL75	75W	131 lm/w	9,104	9,105	9,106
WPL100	100W	131 lm/w	13,507	13,509	13,510

OPTIONS

EMERGENCY BACK UP BATTERY (SOLD SEPARATELY)



BLD-CM8N

8W Emergency Backup Battery LED Driver

BLD-CM15N

15W Emergency Backup Battery LED Driver

BLD-CM20N

20W Emergency Backup Battery LED Driver

MINI PHOTOCELL (SOLD SEPARATELY)



PCT M

JL-413C

Rated Voltage: 120-277V

Frequency: 50/60 Hz



Please visit orelighting.com to see which products are DLC Listed.

ORE | OUTDOOR

Houston, Texas

| Sales@orelighting.com

| 346-874-7955

| www.orelighting.com

Note: Information contained herein is subject to change without notice.

©2023 ORE Lighting INC. All rights reserved