

Project Name:
Part Number:
Fixture Type
Notes:

WPLA LED Tunable Full Cutoff Wall Pack Light

APPLICATIONS

The WPLA is a LED full cutoff wall pack featuring 4 selectable lumen outputs and 3 selectable CCT color outputs. This budget friendly, contractor experience LED wall pack features a pre-installed, low-voltage photocell installed directly to the driver, additional the heat - sink fins just for the LED module - increasing the total performance lifespan, and shipped in an "anti-crush" advanced box. Selectable lumen range: 5,200 - 11,100 lm Selectable CCT range: 3000K - 5000K



WPLA 30W



WPLA 70W / 120W

DLC Listed

This product is on the DESIGN Lights Consortium (DLC Premium 5.1) Qualified Products List and is eligible for rebates from DLC Member Utilities.

UL Listing

Suitable for wet locations



Replacement

Replaces 175W MH - 400W MH

ORDERING INFORMATION



EXAMPLE: WPLA 30 4K UNV

Series	Power & Watt Selectable	CCT Selectable	Finish	Voltage	Options
WPLA	30 - 30W 70 - 70W 120 - 120W	3K* 3000K 4K 4000K 5K 5000K	BZ Dark Bronze	UNV 120-277V	Blank = No Accessories PCT M = 120 - 277V only JL-413C Mini Photocell BLD-CM4N* = 4W Emergency Backup Battery 120-277V only BLD-CM8N = 8W Emergency Backup Battery 120-277V only BLD-CM15N = 15W Emergency Backup Battery 120-277V only ANT-5-4T = Bi level Microwave Motion Sensor BRI810-B-M7= Microwave Motion Sensor
					*3000K only for 30W and 70W Wall Pack Light
					*4W Emergency Battery only for 30W Wall Pack Light

Accessories & Options



BLD-CM4N



BLD-CM8N



BLD-CM15N



PCT M



ANT-5-4T



BRI810-B-M7

SPECIFICATIONS

DRIVER

One Driver, Constant Current, Class I, 120-277V, 480V, 50-60Hz, Power Factor 98%

ELECTRICAL

High quality constant-current drivers >90% efficiency and rated for 50/60Hz operation with Standard 120-277V input. 1-10V Dimming

LIFESPAN

50,000 – hour LED lifespan based on IES LM-80 results and TM-21 calculations.

LUMENS SELECTABLE

Selectable lumen packages ranging from 1,600 - 3,800 lm for 30W fixture
4,900 - 18,600 lm for 70W & 120W fixture

CCT SELECTABLE

Switch selectable
3000K / 4000K / 5000K; 70+ CRI

EFFICACY

Up to 140 lumens per watt for 30W fixture
Up to 170 lumens per watt for 70W & 120W fixture

COLOR UNIFORMITY

ORE's range of CCT (Correlated Color Temperature) follows the Chromaticity of Solid-State Lighting (SSL) Products

AMBINET TEMPERATURE

Suitable for use in -40°F to 131°F (-40°C to 55°C)

HOUSING

One piece die-cast aluminum housing with integral heat-sink fins

IP RATING

Ingress Protection rating of IP65 for dust and water

FINISH

Formulated for high-durability and long-lasting color
Polyester Powder Dark Bronze coat




GREEN TECHNOLOGY

Mercury and UV-free. RoHS compliant components.
Polyester powder coat finish formulated without the use of VOCs or toxic heavy metals

WARRANTY

5 year limited warranty. Comprehensive warranty terms can be located on www.orelighting.com

DIMENSIONS

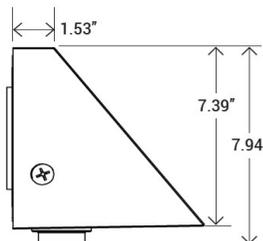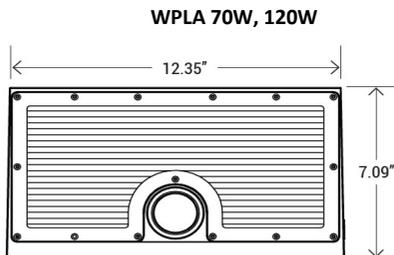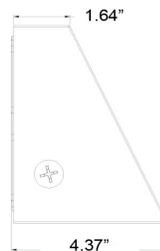

Product	A	B	C	D	Weight
WPLA 30W	9.91"	4.37"	5.80"	1.64"	4.3 lbs
WPLA 70W/120W	12.35"	7.09"	7.39"	1.53"	8.6 lbs

PERFORMANCE DATA

PART NUMBER	WATTAGE	EFFICACY	3000K	4000K	5000K
			LUMENS	LUMENS	LUMENS
WPLA 30	30W	137 lm/W	3648 lm	3879 lm	3698 lm
WPLA 70	70W	170 lm/W	11851 lm	11855 lm	11856 lm
WPLA 120	120W	165 lm/W	N/A	18643 lm	18648 lm

ADJUSTABLE LUMEN OUTPUT

POWER	VOLTAGE	30W		70W		120W	
		WATTS	LUMENS	WATTS	LUMENS	WATTS	LUMENS
40%	120-277V	12W	1693 lm	28W	4902lm	48W	7959 lm
60%	120-277V	18W	2483 lm	42W	6948 lm	72W	11757 lm
80%	120-277V	24W	3202 lm	56W	8951 lm	96W	15447 lm
100%	120-277V	30W	3698 lm	70W	11856 lm	120W	18648 lm

OPTIONS



EMERGENCY BACK UP BATTERY (SOLD SEPARATELY)

BLD-CM4N

4W Emergency Backup Battery LED Driver. 90 min

BLD-CM8N

8W Emergency Backup Battery LED Driver. 90 min

BLD-CM15N

15W Emergency Backup Battery LED Driver. 90 min



MINI PHOTOCELL (SOLD SEPARATELY)

PCT M

JL-413C

Rated Voltage: 120-277V

Frequency: 50/60 Hz



ANT-5-4T & BRI810-B-M7

Microwave Motion Sensor

Rated Voltage: 120-277V

Detection radius/angle: Max 26ft/360°

Mounting height: Max 40ft



Please visit orelighting.com to see which products are DLC Listed.

ORE | OUTDOOR