

DS T1&T2 - 6" LED Disk Down Light

Please read carefully and save these instructions, as you may need them later.

1. Installation or assembly instructions and wiring instructions that specify the proper method of connecting the grounding means and maintaining polarity shall be included with the luminaire in a manner that will require the installer to handle the instructions during installation.

2. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved and CE.

3. Consult a qualified electrician to ensure the correct branch circuit conductor and consulter.

Warning - Risk of fire or electric shock

- Do not make or alter any open holes in an enclosure of wiring or electrical components during lamp installation.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Suitable for wet locations.
- Suitable for Type IC or suitable for Type Non-IC.
- This device is not intended for use with emergency exits.

Assembly and Installation

This IC/AT fixture is intended for use in suspended ceilings (with or without insulation). Shut off power before installation.

Remove lens by twisting counter clockwise (FIG.1)

Switch to the most surface is 2700K, switch to the bottom is 5000K. The middle is 3000K, 3500K, 4000K respectively (FIG.2)

Connect supply wires to wires on the fixture with wire nuts or push wires into the Quick Connector. Connect white to white, black to black, and green to green as a grounding connection. (FIG.3)

Arrange the wires into the back of the junction box. Align appropriate holes in the mounting fixture with the holes in the junction box. Using 2 of the longer screws (either #6 or #8 screws, depending on the size of the holes in your junction box) attach the mounting fixture is flush with the ceiling. Do not over-tighten screws or fixtures will not be tight to the ceiling. Complete the installation by turning lens clockwise to lock (FIG.4)

Once the fixture is mounted on the wall, caulk the space between the wall and the shell. (FIG.5)

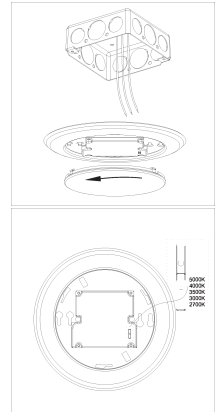


FIG.1




FIG.2




FIG.3




FIG.4




FIG.5

DS T1 - 6" LED Disk Down Light

Assembly and Installation

Remove the lens by twisting counter clockwise. (FIG.1)

Switch to the most surface is 2700K, switch to the bottom is 5000K.
The middle is 3000K,3500K,4000K respectively (FIG.2)

This type of installation represents a 5-inch barrel. (FIG.3)

This type of installation represents a 6-inch barrel. (FIG.4)

Place spring on the mounting bracket and complete the installation by twisting the lens on the light. (FIG.5)

Nuts or push wires into Quick Connector. Connect white to white, black to black, and green to green as a grounding connection. Plug the female connector or the retrofit trim onto the male connector of the can. (FIG.6)

Tuck all wires into the can and carefully push the retrofit trim into can.

Following is a list of recommended dimmers:

Brand	Lutron	Leviton
Model	NT-1000	6674
	S-603P	6633-P
	S-600P	6672
	DVCL-163P-WH	6631
	CTCL-153PDH-WH	IPL06
	SLV-600P-WH	1E1205
	DV-600P	DB33K1
	CT-603PGH-WH	1F4205
	MIR-600THW-WH	1A2305
	MACL-153M-WH	DD00R-DL
	S-600PR-WH	DSL06-1TW
	DVLV-603P-IV	IPV0R
	DVW-603PGH-WH	
	DVFSQ-LFH	
	SCL-153PR-WH	
	CT-600PR-WH	
	CT-103PR-WH	
	DVWCL-153PH-LA	
	CTCL-150H-WH	
	CTCL-153PR-WH	
	STCL-153PH-WH	



FIG.1



FIG.2




FIG.3




FIG.4



FIG.5



FIG.6