


FUNCTION ADJUSTMENT

Follow instructions below to change the Fixture Power (W) and/or Color Temperature (CCT) from factory settings:

Factory Default Settings: Max wattage, 5000K

1. Locate the selector switches located on the side of the housing as shown.
2. Select Color Temperature (CCT) and/or Power (W) by sliding the respective switch to the desired value.

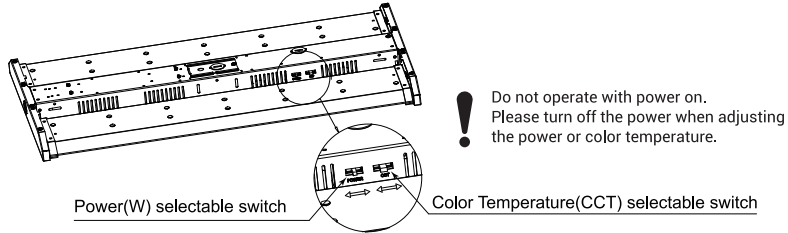

WIRING INSTRUCTION


WARNING: TURN OFF POWER BEFORE CONNECTING WIRES.

Black wire connects to L, White wire connects to N, Green wire connects to GROUND.

For 0-10V dimming, the wiring direction as below

1. Turn off the power
2. Connect the BLACK wire with the LINE.
3. Connect the WHITE wire with the COMMON
4. Connect the GREEN wire with the GROUND
5. Connect the PURPLE wire with the (V+) DIM
6. Connect the PINK wire with the (V-) DIM

Caution: DO NOT connect the PINK(-) DIM V- wire with GROUND




MAINTENANCE AND CLEANING

WARNING: TURN OFF POWER BEFORE MAINTENANCE AND CLEANING.

1. Before touching the fixture, make sure the fixture is cooling.
2. Do not clean or maintain while the fixture is energized.
3. Clean the lens & fixture with a non-abrasive glass cleaning solution.
4. Do not open the fixture to clean and touch LED chips.


Linear High Bay

Installation Instructions

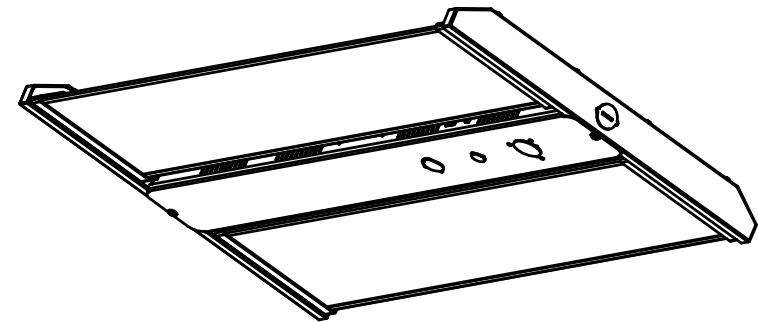

110W/165W/220W/300W

DIMENSIONAL DRAWING

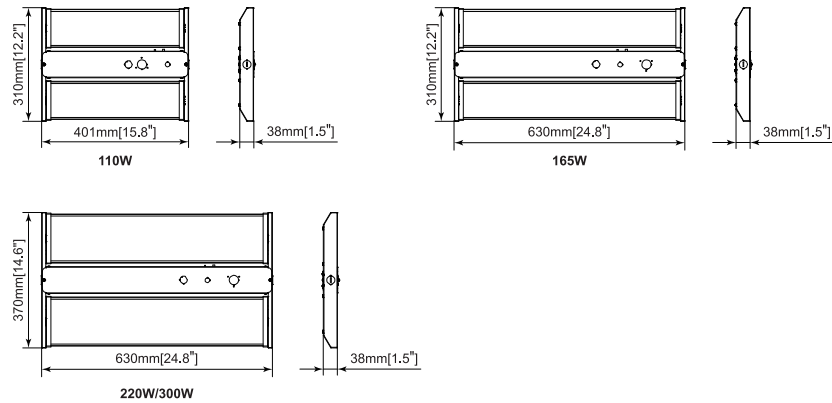

IMPORTANT CAUTION


READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

WARNING: TURN OFF POWER BEFORE INSTALLATION.

1. Review the diagrams before beginning, and make sure the fixture is grounded properly.
2. This fixture has to be installed or maintained in accordance with the application code by a professional person who is familiar with the construction and operation of the product and the hazards involved.
3. This fixture must be wired in accordance with the international electrical code and applicable local codes and ordinances.
4. Proper grounding is required to ensure personal safety. Carefully observe the correct grounding procedure under the installation section.
5. Check that the voltage is compatible with the fixture driver, and use approved connectors for all electrical connections.


INSTALLATION

Surface Mount installation:

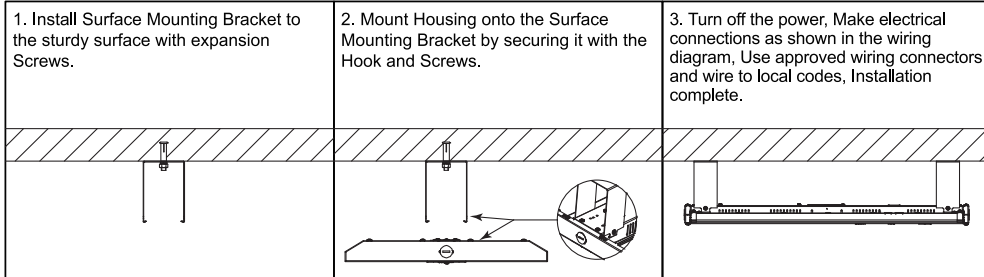

INSTALLATION

Chain Mount installation:

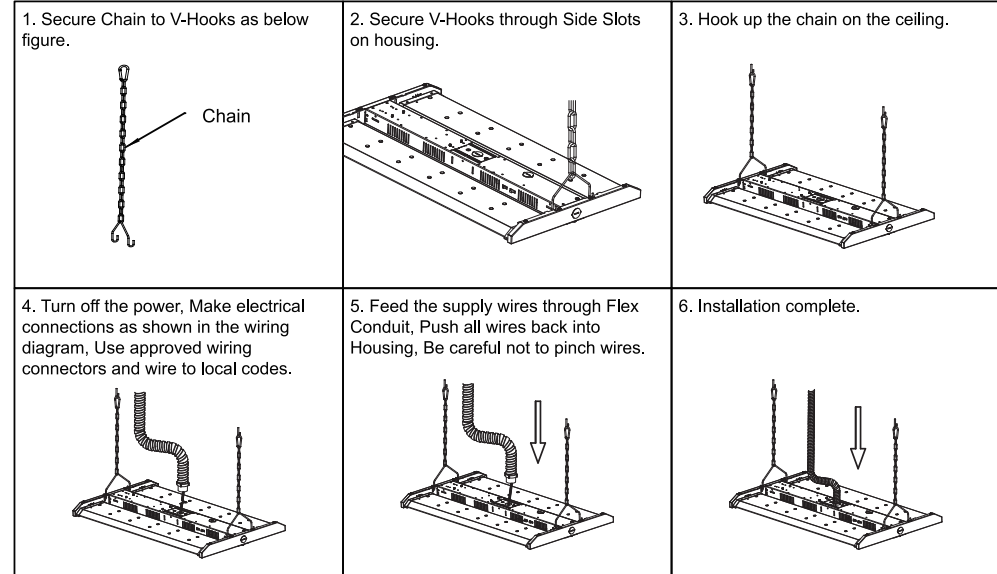

Pendant Mount installation:

