

Project Name:
Part Number:
Fixture Type
Notes:

## WPLM LED Mini Wall Pack Light

### APPLICATIONS

The LED wall mount luminaire provides a flush-mounted, architectural design with high performing energy efficient illumination resulting in up to 88 percent energy savings. WPLM replaces up to 70W incandescent, making it ideal for pathways, building entrances, and perimeter lighting.

### UL Listing

Suitable for wet locations

### Replacement

Replaces 50W MH - 70W MH



WPLM 15W/25W



WPLM2 17W/25W



### ORDERING INFORMATION

EXAMPLE: WPLM 15W 4K BZ UNV

Series	Wattage	CCT Selectable	Finish	Voltage	Options
WPLM	15W 2,246 lm 25W 3,656 lm	3K 3000K 4K 4000K 5K 5000K	BZ Dark Bronze	UNV 120-277V	Blank = No Accessories PCT M = Photocell 120 - 277V
Including photocell					

Series	Wattage	CCT	Finish	Voltage	Options
WPLM2	17W 1,950 lm 25W 2,600 lm	4K 4000K 5K 5000K	BZ Dark Bronze	UNV 120-277V	Blank = No Accessories PCT M = Photocell 120 - 277V
Including photocell					

### Accessories



PCT M

### PERFORMANCE DATA

PART SERIES	WATTAGE	EFFICACY	3000K	4000K	5000K
			LUMENS	LUMENS	LUMENS
WPLM 15	15W	153 lm/W	2,130	2,246	2,218
WPLM 25	25W	152 lm/W	3,423	3,656	3,571
WPLM2 17	17W	115 lm/W	N/A	1,950	1,952
WPLM2 25	25W	112 lm/W	N/A	2,600	2,613

# ORE LIGHTING

## SPECIFICATIONS

### HOUSING

Sealed waterproof housing for both indoor and outdoor application.

### AMBINET TEMPERATURE

Suitable for use in -40°F to 122°F (-40°C to 50°C)

### MOUNTING

Mounting options include J-Box mount and Surface conduit

### CCT SELECTABLE

Switch selectable  
3000K / 4000K / 5000K; 70+ CRI for WPLM

### CCT (SINGLE)

4000K / 5000K for WPLM2

### EFFICACY

Up to 150 lumens per watt for WPLM  
Up to 115 lumens per watt for WPLM2

### OPTICS

Vacuum metalized specular reflector. Clear polycarbonate lens.

### ELECTRICAL

Standard voltage 120-277V. High quality constant-current driver with the efficiency of (>90% standard); 50/60Hz

### ENERGY DATA

Power factor above 90%.

### FINISH

Dark Bronze Polyester Powder coat.

### IP RATING

Ingress Protection rating of IP65 for dust and water


### GREEN TECHNOLOGY

Mercury and UV-free. RoHS compliant components. Polyester powder coat finish formulated without the use of VOCs or toxic heavy metals

### WARRANTY

5 year limited warranty. Comprehensive warranty terms can be located on [www.orelighting.com](http://www.orelighting.com)

## DIMENSIONS

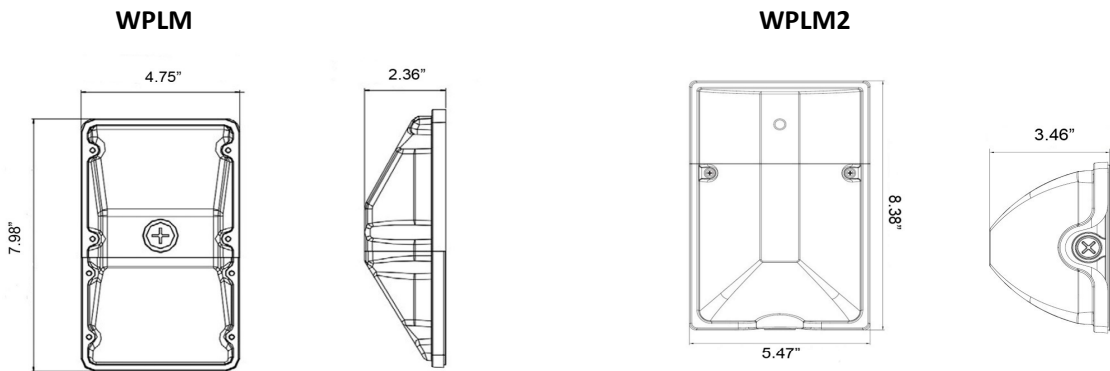

Product	A	B	C	Weight
WPLM 15W/25W	7.98"	4.75"	2.36"	1.26 lbs
WPLM2 17W/25W	8.37"	5.47"	3.46"	1.85 lbs

## ELECTRICAL LOAD

WATTAGE	Current (A)			
	120V	208V	240V	277V
15W	0.13	0.07	0.06	0.05
25W	0.21	0.12	0.10	0.09
17W	0.14	0.08	0.07	0.06
25W	0.21	0.12	0.10	0.09