

Project Name:
Part Number:
Fixture Type
Notes:

## WPLN2 LED Tunable Full Cutoff Wall Pack Light

### APPLICATIONS

The WPLN2 is a LED full cutoff wall pack featuring 4 selectable lumen outputs and 3 selectable CCT color outputs. This budget friendly, contractor experience LED wall pack features a pre-installed, low-voltage photocell installed directly to the driver, additional the heat -sink fins just for the LED module - increasing the total performance lifespan, and shipped in an "anti-crush" advanced box. Selectable lumen range: 3,800 - 14,800 lm Selectable CCT range: 3000K - 5000K



### DLC Listed

This product is on the DESIGN Lights Consortium (DLC Premium 5.1) Qualified Products List and is eligible for rebates from DLC Member Utilities.

**WPLN2 26W/38W/65W/100W/135W**

### UL Listing

Suitable for wet locations



### Replacement

Replaces 175W MH - 400W MH

## ORDERING INFORMATION



EXAMPLE: WPLN2 26 SCT UNV

Series	Power & Wattage Selectable	CCT Selectable	Finish	Voltage	Options
WPLN2	26 = 26W 38 = 38W 65 = 65W 100 = 100W 135* = 135W	3K 3000K 4K 4000K 5K 5000K	BLANK Dark Bronze	UNV 120-277V HVU* 347-480V	Blank = No Accessories PCT M = 120 - 277V only JL-413C Mini Photocell BLD-CM8N* = 8W Emergency Backup Battery 120-277V only
	<p>*Emergency battery only for 26W, 38W and 65W                      *347-480V only for 65W and 100W Wall Pack Light                      *135W only has a single CCT</p>				

## Accessories & Options



BLD-CM8N



PCT M

## SPECIFICATIONS

### ELECTRICAL

High quality constant-current drivers >90% efficiency and rated for 50/60Hz operation with Standard 120-277V input. 1-10V dimming

### LIFESPAN

50,000 – hour LED lifespan based on IES LM-80 results and TM-21 calculations.

### OPTICS

Anti-UV prismatic translucent lens designed to shape the light distribution and uniformity

### MOUNTING

Can be mounted directly over a standard electrical junction box

### CCT SELECTABLE

3000K (Warm)  
4000K (Neutral)  
5000K (Cool)

### LUMENS SELECTABLE

Selectable lumen packages ranging from 3,900 - 9,700 lm for a small wall pack light  
15,000 - 20,000 lm for a medium wall pack light

### EFFICACY

Up to 145 lumens per watt

### AMBIENT TEMPERATURE

Suitable for use in -40°F to 104°F (-40°C to 40°C)

### HOUSING

Two-piece die-cast aluminum housing secures the thermally conductive LED panel and electrical chamber. Separate heat-sink fins for LED module for increased performance life time.

### FINISH

Formulated for high-durability and long-lasting color  
Polyester Powder Dark Bronze coat


### GREEN TECHNOLOGY

Mercury and UV-free. RoHS compliant components.  
Polyester powder coat finish formulated without the use of VOCs or toxic heavy metals


### WARRANTY

5 year limited warranty. Comprehensive warranty terms can be located on [www.orelighting.com](http://www.orelighting.com)

## DIMENSIONS

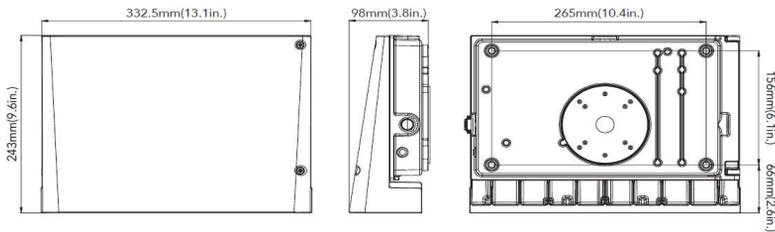

**Small Size: 26W, 38W, 65W**

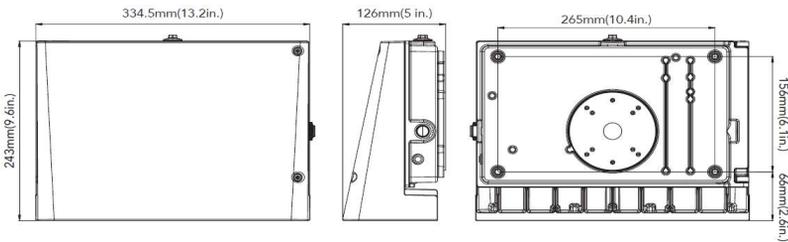

**Medium Size: 100W, 135W**

Product	A	B	C	Weight
WPLN2 - 26/38/65	13.1"	9.6"	3.8"	5.3 lbs
WPLN2 - 100/135	13.2"	9.6"	5.0"	5.8 lbs

## PERFORMANCE DATA

PART NUMBER	WATTAGE	EFFICACY	3000K	4000K	5000K
			LUMENS	LUMENS	LUMENS
WPLN2-26	26W	146 lm/W	3800 lm	4000 lm	3900 lm
WPLN2-38	38W	147 lm/W	5600 lm	6000 lm	5700 lm
WPLN2-65	65W	146 lm/W	9500 lm	10000 lm	9700 lm
WPLN2-100	100W	148 lm/W	14800 lm	15500 lm	15000 lm
WPLN2-135	135W	145 lm/W	19000 lm	20000 lm	20000 lm

## ADJUSTABLE LUMEN OUTPUT

POWER	VOLTAGE	26W		38W		65W		100W	
		WATTS	LUMENS	WATTS	LUMENS	WATTS	LUMENS	WATTS	LUMENS
40%	120-277V	12W	1882 lm	17W	2789 lm	24W	4043 lm	43W	6668 lm
60%	120-277V	16W	2503 lm	23W	3698 lm	35W	5783 lm	62W	9549 lm
80%	120-277V	21W	3374 lm	31W	4871 lm	49W	7873 lm	84W	12726 lm
100%	120-277V	26W	3918 lm	38W	5691 lm	65W	9817 lm	100W	14951 lm

## OPTIONS



### EMERGENCY BACK UP BATTERY (SOLD SEPARATELY)

#### BLD-CM8N

8W Emergency Backup Battery LED Driver. 90 min



### MINI PHOTOCELL (SOLD SEPARATELY)

#### PCT M

JL-413C

Rated Voltage: 120-277V

Frequency: 50/60 Hz



Please visit [orelighting.com](http://orelighting.com) to see which products are DLC Listed.

# ORE | OUTDOOR

Houston, Texas

[Sales@orelighting.com](mailto:Sales@orelighting.com)

346-874-7955

[www.orelighting.com](http://www.orelighting.com)

Note: Information contained herein is subject to change without notice.

©2023 ORE Lighting INC. All rights reserved