

|               |
|---------------|
| Project Name: |
| Part Number:  |
| Fixture Type  |
| Notes:        |

## BL LED Tunable 38W Bollard Light

### APPLICATIONS

The Standard LED bollard with modern circular column shape provides downlight via various different tops including dome top, flat top and peak top. The LED bollard is with high quality extrusion aluminum body, clear polycarbonate lens and galvanized steel tray. The LED bollard is ideal for parks, lawns, plazas and residential applications.

### DLC Listed

This product is on the DESIGN Lights Consortium (DLC Premium 5.1) Qualified Products List and is eligible for rebates from DLC Member Utilities.

### ETL Listing

Suitable for wet locations

### EFFICACY

Up to 130 lumens per watt




BL 38W Sphere & Cylinder



## ORDERING INFORMATION

EXAMPLE: BL 38 4K BZ C UNV

| Series | Wattage | CCT Selectable                   | Finish            | Type                         | Voltage         |
|--------|---------|----------------------------------|-------------------|------------------------------|-----------------|
| BL     | 38 38W  | 3K 3000K<br>4K 4000K<br>5K 5000K | BZ<br>Dark Bronze | C<br>Cylinder<br>S<br>Sphere | UNV<br>120-277V |

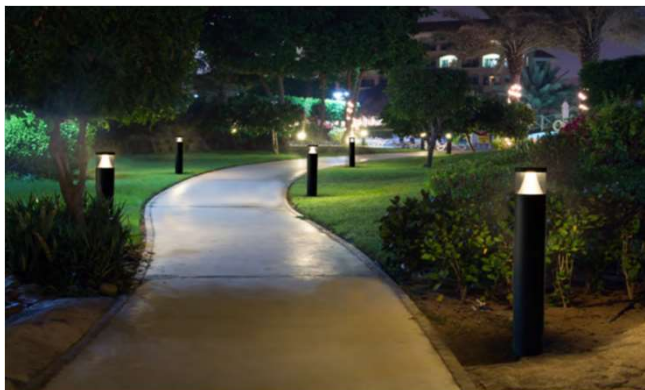

# ORE LIGHTING

---

## SPECIFICATIONS

---

### INSTALLATION

Mounting includes concrete bollard base and anchor bolts for sturdy installation.

### OPTICS

Reflective cup gather light and make the coverage of the light larger Annular diffuser with 360° glow soft light around

### LIFESPAN

100,000 – hour LED lifespan based on IES LM-80 results and TM-21 calculations.

### INSTALLATION

Mounting includes concrete bollard base and anchor bolts for sturdy installation.

### COLOR TEMP

Selectable 3000K / 4000K / 5000K CCT available, > 80 CRI

### EFFICACY

Up to 130 lumens per watt

### COLOR UNIFORMITY

ORE's range of CCT (Correlated Color Temperature) follows the Chromaticity of Solid-State Lighting (SSL) Products

### AMBINET TEMPERATURE

Suitable for use in -40°F to 113°F (-40°C to 45°C)

### HOUSING

Sealed die-cast aluminum housing

### IP RATING

Ingress Protection rating of IP65 for dust and water

### FINISH

Formulated for high-durability and long-lasting color Polyester Powder Coat Dark Bronze finish.

### ELECTRICAL

50/60Hz operation with 120-277V input. Optional 1-10V dimming.


### WARRANTY

5 year limited warranty. Comprehensive warranty terms can be located on [www.orelighting.com](http://www.orelighting.com)



# ORE LIGHTING

## DIMENSIONS

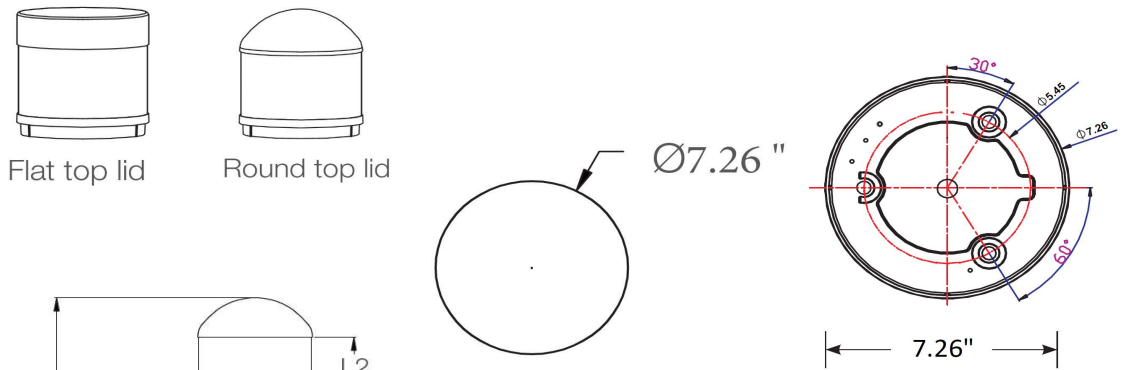

| Product | Diameter | L      | L1     | L2    |
|---------|----------|--------|--------|-------|
| BL 38W  | Ø 7.26 " | 41.45" | 33.50" | 4.72" |

### Weight

Cylinder: 10.80 lbs  
 Sphere: 11.46 lbs



Please visit [orelighting.com](http://orelighting.com) to see which products are DLC Listed.

## PERFORMANCE DATA

| PART NUMBER | WATTAGE | VOLTAGE  | EFFICACY | 3000K   | 4000K   | 5000K   |
|-------------|---------|----------|----------|---------|---------|---------|
|             |         |          |          | LUMENS  | LUMENS  | LUMENS  |
| BL38        | 38W     | 120-277V | 130 lm/w | 5099 lm | 5099 lm | 5171 lm |

Houston, Texas | [Sales@orelighting.com](mailto:Sales@orelighting.com) | 346-874-7955 | [www.orelighting.com](http://www.orelighting.com)

Note: Information contained herein is subject to change without notice.

©2023 ORE Lighting INC. All rights reserved