

Project Name:
Part Number:
Fixture Type
Notes:

BL2 LED Tunable 26W Bollard Light

APPLICATIONS

The Standard LED bollard with modern circular column shape provides downlight via various different tops including dome top, flat top and peak top. The LED bollard is with high quality extrusion aluminum body, clear polycarbonate lens and galvanized steel tray. The LED bollard is ideal for parks, lawns, plazas and residential applications.

ANNULAR DIFFUSER

Glow soft light around

REFLECTIVE CUP

Gather light and make the coverage of the light larger

UL Listing

Suitable for wet locations

EFFICACY

Up to 119 lumens per watt




BL2 26W Selectable CCT

ORDERING INFORMATION



EXAMPLE: BL2 26 4K BZ UNV

Series	Wattage	CCT Selectable	Finish	Voltage	Option
BL2	26 26W	3K 3000K 4K 4000K 5K 5000K	BZ Dark Bronze	UNV 120-277V	EM Emergency Battery

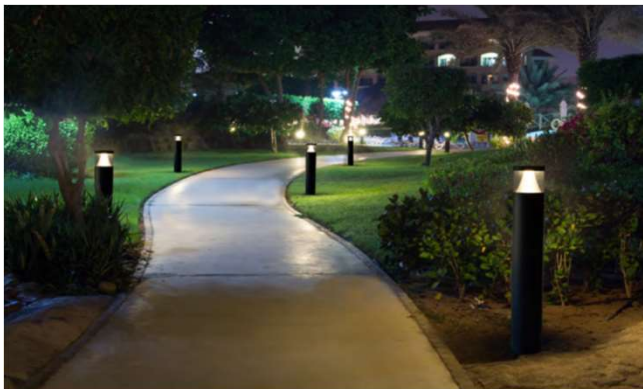

ORE LIGHTING

SPECIFICATIONS

INSTALLATION

Mounting includes concrete bollard base and anchor bolts for sturdy installation.

OPTICS

Reflective cup gather light and make the coverage of the light larger. Annular diffuser with 360° glow soft light around.

LIFESPAN

50,000 – hour LED lifespan based on IES LM-80 results and TM-21 calculations.

INSTALLATION

Mounting includes concrete bollard base and anchor bolts for sturdy installation.

COLOR TEMP

Selectable 3000K / 4000K / 5000K CCT available, > 80 CRI

EFFICACY

Up to 119 lumens per watt

COLOR UNIFORMITY

ORE's range of CCT (Correlated Color Temperature) follows the Chromaticity of Solid-State Lighting (SSL) Products

AMBIENT TEMPERATURE

Suitable for use in -40°F to 113°F (-40°C to 45°C)

HOUSING

Sealed die-cast aluminum housing

IP RATING

Ingress Protection rating of IP65 for dust and water

FINISH

Formulated for high-durability and long-lasting color. Polyester Powder Coat Dark Bronze finish.

ELECTRICAL


50/60Hz operation with 120-277V input. Optional 1-10V dimming.

WARRANTY

5 year limited warranty. Comprehensive warranty terms can be located on www.orelighting.com



DIMENSIONS

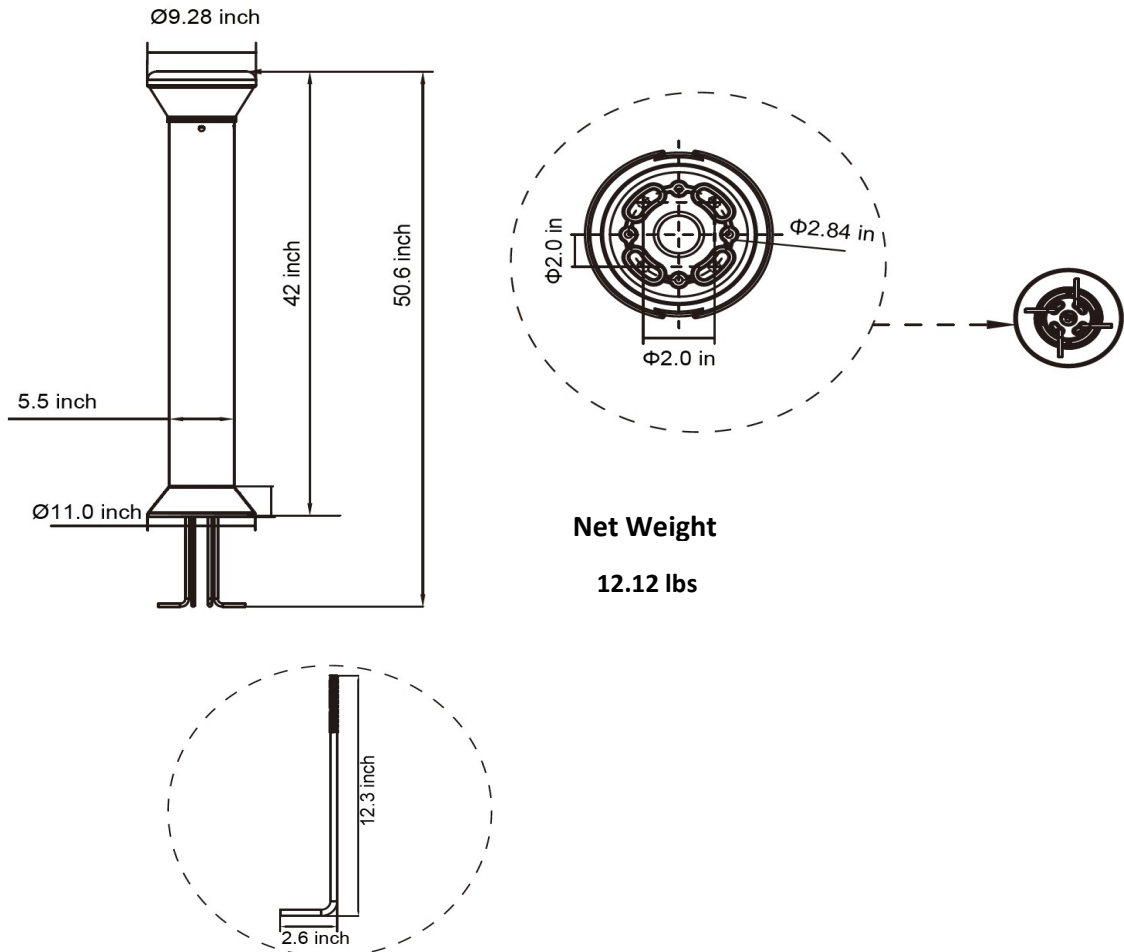

Net Weight

12.12 lbs

PERFORMANCE DATA

PART NUMBER	WATTAGE	VOLTAGE	EFFICACY	3000K	4000K	5000K
				LUMENS	LUMENS	LUMENS
BL2	26W	120-277V	119 lm/w	2800 lm	3000 lm	3100 lm