

Project Name:
Part Number:
Fixture Type
Notes:

DDL LED Dusk to Dawn Light

APPLICATIONS

The Utility Dusk to Dawn area luminaire delivers unmatched light output and functionality in a rugged design that is ideal for low cost and maintenance security lighting applications. This versatile universal mounting allows for quick and easy installation and delivers a wide uniform distribution with excellent vertical illumination for maximum light coverage, whether it is wall mounted security lighting, residential street lighting, perimeter area lighting, parking areas.



UL Listing

Suitable for wet locations

Replacement

Replaces 175W - 250W MH

ORDERING INFORMATION



EXAMPLE: DDL 45 5K GR UNV

Series	Wattage	CCT	Finish	Voltage	Options
DDL	45 45W 65 65W 90 90W	5K 5000K	GR Grey BZ Dark Bronze	UNV 120-277V	Blank = No Accessories PCT 01 = twist lock photocell PWA Pole arm mount

Accessories & Options



PCT 01



PWA

PERFORMANCE DATA

SERIES	WATTAGE	VOLTAGE	CRI	LPW	5000K
					LUMENS
DDL 45	45W	120-277V	70	139 lm/W	6,200 lm
DDL 65	65W	120-277V	70	136 lm/W	8,800 lm
DDL 90	90W	120-277V	70	137 lm/W	12,200 lm

Houston, Texas | Sales@orelighting.com | 346-874-7955 | www.orelighting.com

Note: Information contained herein is subject to change without notice.

©2023 ORE Lighting INC. All rights reserved

ORE LIGHTING

SPECIFICATIONS

MOUNTING

Wall Mount Bracket included. Optional Arm Mount available.

ELECTRICAL

Standard 120-277V input, 50/60Hz operation. Standard NEMA Twist-Lock Photocell included.

LIFESPAN

75,000 – hour LED lifespan based on IES LM-80 results and TM-21 calculations.

OPTICS

Acrylic lens

CCT

5000K (Cool) available, 70+ CRI

EFFICACY

Up to 139 lumens per watt

AMBINET TEMPERATURE

Suitable for use in -40°F to 104°F (-40°C to 40°C)

HOUSING

Die-cast aluminum.

IP RATING

Ingress Protection rating of IP65 for dust and water

FINISH

Polyester Powder Coat in Dark Bronze and Silver Gray


GREEN TECHNOLOGY

Mercury and UV-free. RoHS compliant components. Polyester powder coat finish formulated without the use of VOCs or toxic heavy metals

WARRANTY

5 year limited warranty. Comprehensive warranty terms can be located on www.orelighting.com

DIMENSIONS

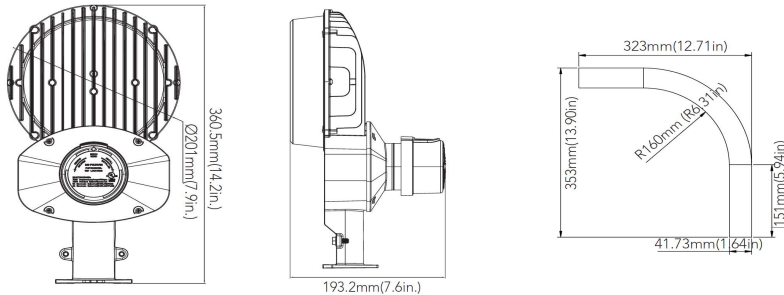

Product	A	B	C	Weight
DDL 45W	Ø7.90"	14.20"	7.60"	4.54 lbs
DDL 65W	Ø7.90"	14.20"	7.60"	4.81 lbs
DDL 90W	Ø7.90"	14.20"	7.60"	5.03 lbs

ELECTRICAL LOAD

WATTAGE	Current (A)			
	120V	208V	240V	277V
45W	0.38	0.22	0.19	0.16
65W	0.54	0.31	0.27	0.23
90W	0.75	0.43	0.38	0.32

Houston, Texas

Sales@orelighting.com

346-874-7955

www.orelighting.com

Note: Information contained herein is subject to change without notice.

©2023 ORE Lighting INC. All rights reserved