

Project Name:
Part Number:
Fixture Type
Notes:

DG Tunable J Box Commercial Downlight

FEATURES

CCT & CRI

CCT Selectable 3000K / 3500K / 4000K, CRI > 80

WATTAGE SELECTABLE

Selectable Watt packages ranging from 10W - 40W

AMBINET TEMPERATURE

Suitable for use in -4°F to 113°F (-20°C to 45°C)

ELECTRICAL

Input Voltage 120-277V with 1-10V dimming.
Emergency Driver available

HOUSING

Integrated J-box with superior LED light engine, aluminum trim ring available
trim ring available in 4", 6", 8" and 10"

LUMENS

Lumen packages ranging from 1,100 to 3,000 lumens

WARRANTY

5 year limited warranty. Comprehensive warranty terms
can be located on www.orelighting.com



UL Listing
Suitable for Damp locations



DG 20W Downlight



DG 40W Downlight



ORDERING INFORMATION

EXAMPLE: DG 20 SCT UNV

Series	Wattage Selectable	CCT Selectable	Voltage	Finish	EB Driver
DG	20	3K 3000K	UNV 120 - 277V	BLANK White Flange with Haze Reflector	EM-H08170 8w Emergency backup battery
	10W/15W/20W 40	35K 3500K			EM-H25170 25w Emergency backup battery
	27W/34W/40W	4K 4000K			


Accessories & Options

TRIM SIZE



DG4-R DG6-R DG8-R DG10-R DG4-S DG6-S DG4-R-W DG6-R-W DG4-S-W DG6-S-W

Trim	Frame
DG4-R 4" Round Trim DG6-R 6" Round Trim DG8-R 8" Round Trim DG10-R 10" Round Trim DG4-S 4" Square Trim DG6-S 6" Square Trim DG4-R-W 4" Round Wall Wash Trim DG6-R-W 6" Round Wall Wash Trim DG4-S-W 4" Square Wall Wash Trim DG6-S-W 6" Square Wall Wash Trim	OF Open Frame for New Construction 4" / 6" / 8" Round Trim only

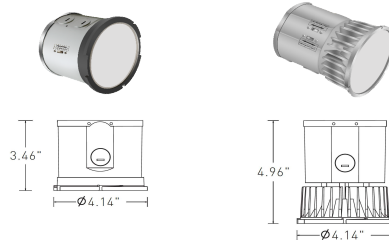

Tunable DG 20W Engine


Tunable DG 40W Engine



OPEN FRAME (New Construction)

OPTIONAL TRIMS

4" Round Trim




Mounting Diameters: 4.7" - 5.2"

6" Round Trim




Mounting Diameters: 6" - 7.3"

8" Round Trim




Mounting Diameters: 7.4" - 8.9"

10" Round Trim




Mounting Diameters: 9.5" - 10.8"

4" Square Trim




Mounting Diameters: 5.3" - 6"

6" Square Trim




Mounting Diameters: 6" - 7.3"

4" Round Wall Wash Trim




Tilt: 15 - 20°
Mounting Diameters: 5.3" - 6"

6" Round Wall Wash Trim




Tilt: 15 - 20°
Mounting Diameters: 6" - 7.3"

4" Square Wall Wash Trim



Tilt: 15 - 20°
Mounting Diameters: 5.3" - 6"



6" Square Wall Wash Trim



Tilt: 15 - 20°
Mounting Diameters: 6" - 7.3"

ORE LIGHTING

OPTIONAL NEW CONSTRUCTION FRAME KITS

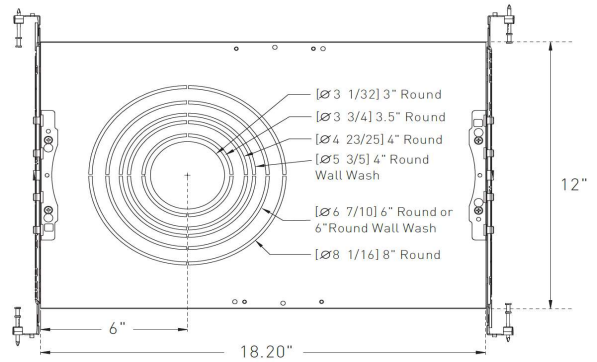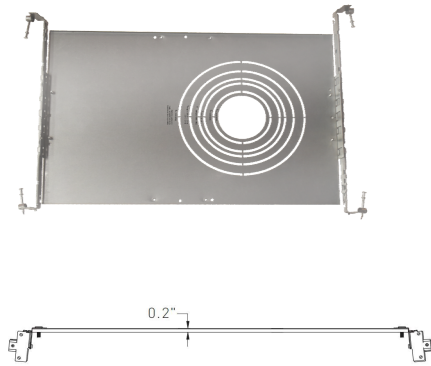

PERFORMANCE DATA

PART NUMBER	WATTAGE	CRI	4 Inch Trim	6 Inch Trim	8 Inch Trim	10 Inch Trim
			LUMENS	LUMENS	LUMENS	LUMENS
DG10	10W	80+	769	774	774	824
DG15	15W	80+	1,129	1,162	1,163	1,232
DG20	20W	80+	1,404	1,559	1,560	1,689
DG27	27W	80+	2,505	2,726	2,705	2,826
DG34	34W	80+	2,846	3,113	3,183	3,226
DG40	40W	80+	3,157	3,098	3,686	3,661