

Project Name:
Part Number:
Fixture Type
Notes:

NPE Tunable Surface Linear Light

FEATURES

CCT SELECTABLE & CRI
CCT Selectable 3000K / 3500K / 4000K, CRI > 90

WATTAGE SELECTABLE
Selectable Watt packages ranging from 20W - 40W

AMBINET TEMPERATURE
Suitable for use in 32°F to 104°F (0°C to 40°C)

EFFICACY
Up to 105 lm/w

HOUSING
The body is made of extruded aluminium. The standard finish is polyester powder white.

MOUNTING
Comes with a 5' suspension cable, a 5' white power cord and a white canopy.
Capable of row mounting to create continuous line without additional hardware or accessories

ELECTRICAL
Standard 120/277V with 50/60Hz, 1-10V dimming.

OREDERING INFORMATION



NPE Surface Linear Light



EXAMPLE: NPE 4FT 40 33K WT UNV D

Series	Length	Wattage Selectable	CCT Selectable	Finish	Voltage	Dimmable
NPE	*2FT 2 feet	20W	SCT	WT	UNV	D
	3FT 3 feet	30W	3000K	White	120 - 277V	1 - 10V dimming
	4FT 4 feet	40W	3500K			
			4000K			

*The single wattage of 2FT is only 20W

MOUNTING OPTIONS & ACCESSORIES


Mounting Accessories	Suspended Kits	EB Driver
DWCA Dry Ceiling Kit (Round / Square) (1 pcs 2"canopy + 1 pcs 4" canopy White/black finish optional) FDCA Flat Drop Ceiling Kit (2 set flat T-grid clips + 1 pcs J-Box + 1 pcs 4" canopy + 1 pcs 2" canopy. Compatible with 9/16" or 15/16" flat grid) SDCA 9/16" Slot Drop Ceiling Kit (2 set 9/16" slot T-grid clips + 1 pcs J-BOX + 1 pcs 4" canopy + 1 pcs 2" canopy) SMA Surface and Wall Mount Kit (Square Plate + Male Quick Connector + Butterfly Drywall Anchor)	SPFC01 5' Suspended Power Feed & Cable (1 pcs 5ft power cord + 2 pcs 5ft aircraft cables) SPFC02 12' Suspended Power Feed & Cable (1 pcs 12ft power cord + 2 pcs 12ft aircraft cables)	EM-H08170 8w Emergency backup battery EM-H25170 25w Emergency backup battery

DIMENSIONS


NPE 2FT Surface Linear Light




NPE 3FT Surface Linear Light

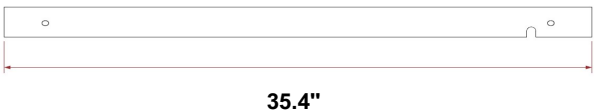

NPE 4FT Surface Linear Light

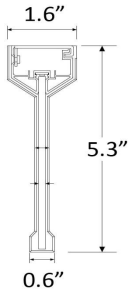

MOUNTING OPTION

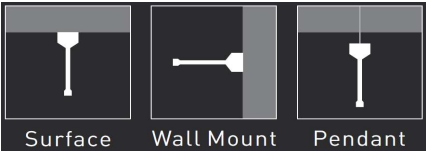


ELECTRICAL LOAD



WATTAGE	CURRENT (A)			
	120V	208V	240V	277V
20W	0.17	0.10	0.08	0.07
30W	0.25	0.14	0.13	0.11
40W	0.33	0.19	0.17	0.14


CEILING MOUNT

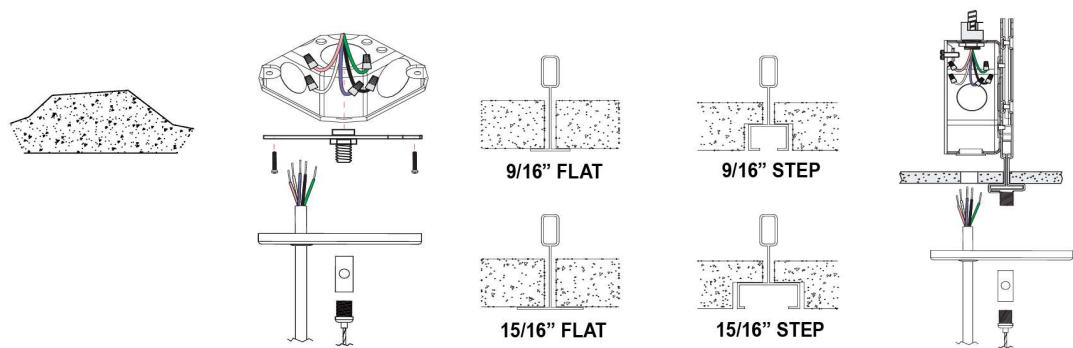


DAY CEILING / OFF GRID

DROP CEILING / ON GRID


MOUNTING CANOPY SIZE

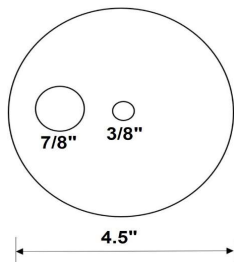


POWER FEED CANOPY
(DWCA Round)



POWER FEED CANOPY
(DWCA Square)

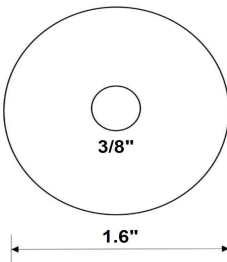

HANG CANOPY
(DWCA Round)



HANG CANOPY
(DWCA Square)