

Project Name:
Part Number:
Fixture Type:
Notes:

NPUO Tunable Slim Linear Light

FEATURES

CCT & CRI

CCT Selectable 3000K / 3500K / 4000K, CRI > 80

WATTAGE SELECTABLE

Selectable Watt packages ranging from 20W - 40W

AMBINET TEMPERATURE

Suitable for use in 32°F to 104°F (0°C to 40°C)

EFFICACY

Up to 100 lm/w

HOUSING

Body consists of extruded aluminum with internal driver

MOUNTING

Surface mount, recessed mount, wall mount

ELECTRICAL

Standard 120/277V with 50/60Hz, 1-10V dimming.

WARRANTY

5 year limited warranty. Comprehensive warranty terms can be located on www.orelighting.com



NPUO 4 FT - 4 & 6 inch Width Light



ORDERING INFORMATION


EXAMPLE: NPUO 4FT 4" WS SCT WT UNV D

Series	Length	Width	Wattage Selectable	CCT Selectable	Finish	Voltage	Dimmable
NPUO	4FT 4 feet	4" 4 inch	20W	SCT	WT White	UNV 120 - 277V	D 1 - 10V dimming
		6" 6 inch	30W	3000K			
			40W	3500K 4000K			




DIMENSIONS

NPUO 4FT 4 Inch Linear Light

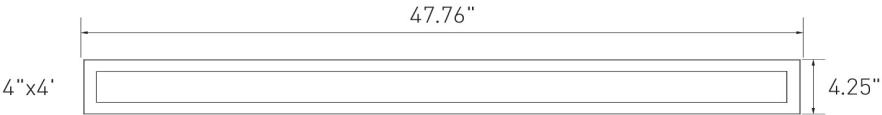

NPUO 4FT 6 Inch Linear Light

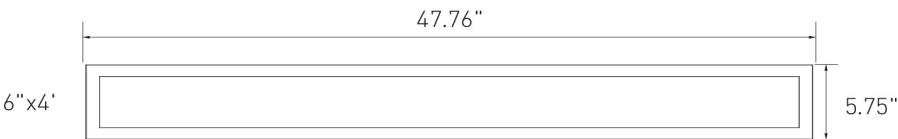

ORE LIGHTING

PERFORMANCE DATA

PART NUMBER	WATTAGE	3000K		3500K		4000K	
		LUMENS	CRI	LUMENS	CRI	LUMENS	CRI
NPUO 4FT 4"	20W	1,500	80+	1,700	80+	1,600	80+
	30W	2,250	80+	2,500	80+	2,400	80+
	40W	3,000	80+	3,400	80+	3,200	80+
NPUO 4FT 6"	20W	1,800	80+	2,000	80+	1,900	80+
	30W	2,700	80+	3,000	80+	2,850	80+
	40W	3,600	80+	4,000	80+	3,800	80+

PROJECTED LED LUMEN MAINTENANCE

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1	0.97	0.97	0.96

ELECTRICAL LOAD

WATTAGE	CURRENT (A)			
	120V	208V	240V	277V
20W	0.17	0.1	0.08	0.07
30W	0.25	0.14	0.13	0.11
40W	0.33	0.19	0.17	0.14

