

Project Name:
Part Number:
Fixture Type
Notes:

SC Tunable LED Slim Canopy Light

FEATURES

The SC Square Canopy Contractor Series provides high lumen output and efficiency in full gasket for weatherability. 4 selectable lumen outputs for different ceiling heights and 3 selectable CCT color outputs. This contractor series luminaire is reliable with surface mounted diodes and high temperature polycarbonate lens to reduce yellowing and directs light to desired locations



SC 25W / 36W / 48W / 60W / 110W

UL LISTING

Suitable for wet locations

APPLICATIONS

Parking Garages, Canopy, Stairwells, Low Bay Installations, etc

REPLACEMENT

100W MH

ORDERING INFORMATION



EXAMPLE: SC 25 4K UNV

Series	Power & Watt Selectable	CCT Selectable	Finish	Voltage	Options
SC	25 25W 36 36W 48 48W 60 60W 110 110W	3K 3000K 4K 4000K 5K 5000K	BLANK Bronze	UNV 120-277V	Blank = No Accessories BRI810-C = PIR Motion Sensor BLD-F5 = 5W Emergency Battery Backup

Accessories & Options



Emergency Battery Backup
5W 800 lm 90 min



PIR External Motion Sensor

ORE LIGHTING

SPECIFICATIONS

OPTICS

Polycarbonate optical lens with heat resistance

ELECTRICAL

Standard 120/277V with 50/60Hz.
Standard 0-10V dimming

MOUNTING

Surface mounting with J-Box or Pendant mount with conduit.

LIFESPAN

50,000 – hour LED lifespan based on IES LM-80 results and TM-21 calculations.

LUMENS SELECTABLE

Selectable lumen packages ranging from 4,000 - 8,400 lm
110W - 16,000 lm output

CCT SELECTABLE

Switch selectable 3000K / 4000K / 5000K

EFFICACY

Up to 160 lumens per watt

COLOR UNIFORMITY

ORE's range of CCT (Correlated Color Temperature) follows the Chromaticity of Solid-State Lighting (SSL) Products

AMBINET TEMPERATURE

Suitable for use in -40°F to 104°F (-40°C to 40°C)

HOUSING

One-piece die-cast aluminum housing secures the thermally conductive LED panel and electrical chamber

IP RATING

Ingress Protection rating of IP65 for dust and water

FINISH

Polyester Powder finish in Dark Bronze and White for superior corrosion resistance and maximum durability.


GREEN TECHNOLOGY

Mercury and UV-free. RoHS compliant components. Polyester powder coat finish formulated without the use of VOCs or toxic heavy metals

WARRANTY

5 year limited warranty. Comprehensive warranty terms can be located on www.orelighting.com

DIMENSIONS

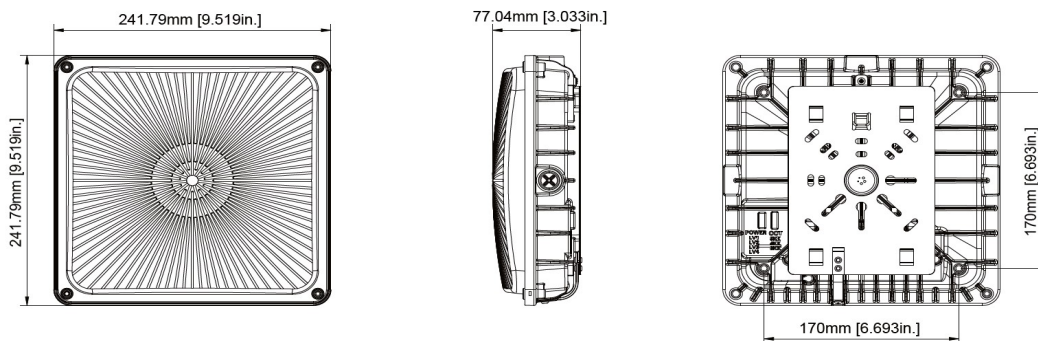

Product	A	B	C	Weight
SC 25/36/48/60/110	9.52"	9.52"	3.03"	3.88 lbs

Houston, Texas | Sales@orelighting.com | 346-874-7955 | www.orelighting.com

Note: Information contained herein is subject to change without notice.

©2023 ORE Lighting INC. All rights reserved

ORE LIGHTING

PERFORMANCE DATA

POWER	WATTS	VOLTAGE	CRI	LPW	3000K	4000K	5000K
					LUMENS	LUMENS	LUMENS
40%	25W	120-277V	70	152 lm/W	3700 lm	4000 lm	3800 lm
60%	36W	120-277V	70	156 lm/W	5200 lm	5600 lm	5300 lm
80%	48W	120-277V	70	146 lm/W	6500 lm	7000 lm	6600 lm
100%	60W	120-277V	70	140 lm/W	7800 lm	8400 lm	8000 lm
100%	110W	120-277V	70	143 lm/W	15700 lm	16000 lm	15850 lm

ELECTRICAL LOAD

POWER	WATTAGE	Current (A)			
		120V	208V	240V	277V
40%	25W	0.21	0.12	0.10	0.09
60%	36W	0.30	0.17	0.15	0.13
80%	48W	0.40	0.23	0.20	0.17
100%	60W	0.50	0.28	0.25	0.22

