

## SC3 LED Garage Canopy Light

### FEATURES

The SC3 Garage Canopy Contractor Series offers extended lumen packages that range from 3,550 to 11,600 lumens. A unique “halolens” design provides smooth and even distribution and directs the light to desired locations. High-temperature polycarbonate lens reduces yellowing and the housing has improved weatherproofing. Unlike the previous generation, the optional emergency battery backup kit fits neatly within the larger housing. This fixture is ideal for applications ranging from Parking Structures, Storage Areas, Entryways, and Low-Level Security Lighting.



SC3 60W / 60\*W



SC3 90W

### UL LISTING

Suitable for wet locations

### APPLICATIONS

Parking Garages, Canopy, Stairwells, Low Bay Installations, etc

### REPLACEMENT

100W - 250W MH

### ORDERING INFORMATION



EXAMPLE: SC3 27 5K UNV

Series	Watt	CCT	Finish	Voltage	Options
SC3	60 60W 90 90W	4K 4000K 5K 5000K	BLANK White	UNV 120-277V	Blank = No Accessories BRI810-C = PIR Motion Sensor BLD-F6 = 8W Emergency Battery Backup
	60* 60W	CCT Selectable 4K 4000K 5K 5000K			

### Accessories & Options



Emergency Battery Backup  
8W 900 lm, 90 min



PIR External Motion Sensor

# ORE LIGHTING

## SPECIFICATIONS

### OPTICS

Vacuum metalized specular reflector with frosted polycarbonate lens.

### ELECTRICAL

Standard 120/277V with 50/60Hz.  
Standard 0-10V dimming.

### MOUNTING

Surface mount or Pendant mount with conduit  
J-box is not included.

### CCT SELECTABLE

Switch selectable 4000K / 5000K only for 60\*W

### CCT

4000K and 5000K available

### EFFICACY

Up to 131 lumens per watt

### AMBINET TEMPERATURE

Suitable for use in -40°F to 113°F (-40°C to 45°C)

### HOUSING

Sealed die-cast aluminum housing.

### LIFESPAN

50,000 – hour LED lifespan based  
on IES LM-80 results and TM-21 calculations.

### FINISH

Polyester Powder finish in White for superior  
corrosion resistance and maximum durability.

### GREEN TECHNOLOGY


Mercury and UV-free. RoHS compliant components.  
Polyester powder coat finish formulated without the use of  
VOCs or toxic heavy metals

### WARRANTY


5 year limited warranty. Comprehensive warranty terms  
can be located on [www.orelighting.com](http://www.orelighting.com)

## DIMENSIONS

### SC3 60W / 60\*W

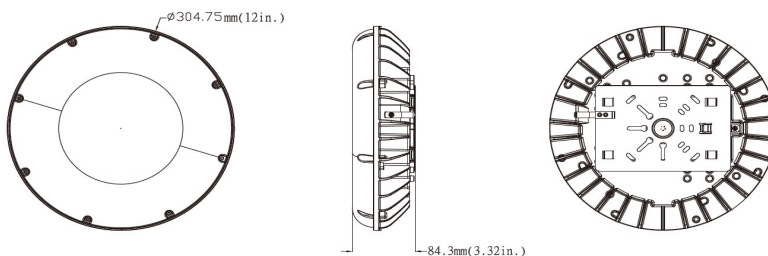

### SC3 90W

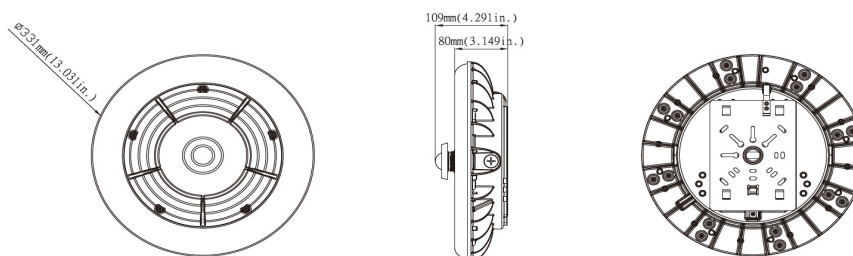

Product	A	B	C	Weight
SC3 60	Ø12.0"	3.32"		5.73 lbs
SC3 90	Ø13.0"	3.15"	4.29"	6.20 lbs

Houston, Texas | [Sales@orelighting.com](mailto:Sales@orelighting.com) | 346-874-7955 | [www.orelighting.com](http://www.orelighting.com)

Note: Information contained herein is subject to change without notice.

©2023 ORE Lighting INC. All rights reserved


# ORE LIGHTING

## PERFORMANCE DATA

WATTS	VOLTAGE	CRI	LPW	Mounting Height	4000K	5000K
					LUMENS	LUMENS
60W	120-277V	70	118 lm/W	10 - 20'	7,597 lm	7,600 lm
90W	120-277V	70	130 lm/W	10 - 20'	11,596 lm	11,600 lm
60*W	120-277V	70	118 lm/W	10 - 20'	7,600 lm	7,605 lm

## ELECTRICAL LOAD

WATTAGE	Current (A)			
	120V	208V	240V	277V
60W	0.50	0.29	0.25	0.22
90W	0.75	0.43	0.38	0.32
60*W	0.50	0.29	0.25	0.22



Mounting Height	8	9	10	11	12
Multiplier	1.6	1.2	1.0	0.8	0.7



Houston, Texas

Sales@orelighting.com

346-874-7955

www.orelighting.com

Note: Information contained herein is subject to change without notice.

©2023 ORE Lighting INC. All rights reserved