

Project Name:
Part Number:
Fixture Type
Notes:

## TWP LED Tunable Wraparound Light

### APPLICATIONS

The TWP LED wraparound is a contractor experience lighting solution designed to save you money, save you time, and install quickly. 3 selectable lumen outputs for different ceiling heights/applications and 3 selectable CCT color outputs. Lightweight for easy installation - engineered with your experience first.



Wraparound 30W / 35W / 40W

### UL Listing

Suitable for wet locations

This LED fixture is available with selectable power/CCT for future-proofing and huge stocking saving needs. Optional dimming and emergency battery backup available.

**WATT/CCT**  
**FIELD-ADJUSTABLE**

Simply select desired CCT and Wattage before installation



### ORDERING INFORMATION



#### EXAMPLE: TWP 4FT 30W 4K UNV

Series	Size	Wattage Selectable	CCT Selectable	Finish	Voltage	Options
TWP	4FT 4 feet	30W-4110 lm 35W-4690 lm 40W-5240 lm	35K 3500K 4K 4000K 5K 5000K	BLANK White	UNV 120-277V	Blank = No Accessories BRI810-B = Microwave Motion Sensor BLD-CM8E = 8W Emergency Backup Battery 120-277V only BLD-CM15H = 15W Emergency Backup Battery 120-277V only

### Accessories & Options



BLD-CM8E



BLD-CM15H



BRI810-B

Houston, Texas | Sales@orelighting.com | 346-874-7955 | www.orelighting.com

Note: Information contained herein is subject to change without notice.

©2023 ORE Lighting INC. All rights reserved

# ORE LIGHTING

## SPECIFICATIONS

### HOUSING

Fabricated 22 ga steel.

### ELECTRICAL

Standard 50/60Hz operation with 120/277V input.  
Standard 1-10V dimming driver.

### OPTICS

Frosted polycarbonate lens for low glare and maximum protection.

### MOUNTING

Surface mounting and V-Hook ready.

### CCT SELECTABLE

Switch selectable 3500K / 4000K / 5000K; 80+ CRI

### LUMENS SELECTABLE

Selectable lumen packages ranging from 4,100 - 5,240 lm

### LIFESPAN

LED light engines are rated > 100,000 at 25°C, L70

### AMBIENT TEMPERATURE

Suitable for use in -40°F to 122°F (-40°C to 50°C)

### EFFICACY

Up to 138 lumens per watt

### FINISH

Polyester Powder White finish.


### GREEN TECHNOLOGY

Mercury and UV-free. RoHS compliant components.  
Polyester powder coat finish formulated without the use of VOCs or toxic heavy metals

### WARRANTY

5 year limited warranty. Comprehensive warranty terms can be located on [www.orelighting.com](http://www.orelighting.com)

## DIMENSIONS

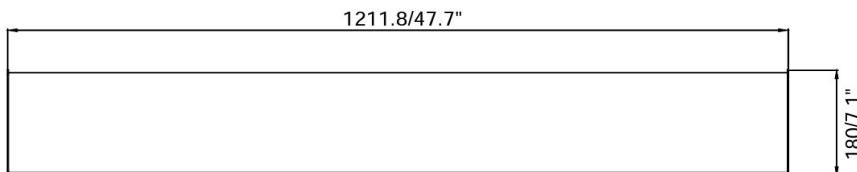

Product	A	B
TWP 4FT	47.7"	7.1"

Weight: 4FT - 7.94 lbs

Houston, Texas | [Sales@orelighting.com](mailto:Sales@orelighting.com) | 346-874-7955 | [www.orelighting.com](http://www.orelighting.com)

Note: Information contained herein is subject to change without notice.

©2023 ORE Lighting INC. All rights reserved

# ORE LIGHTING

## PERFORMANCE DATA

PART NUMBER	WATTAGE	VOLTAGE	CIR	LPW	3500K	4000K	5000K
					LUMENS	LUMENS	LUMENS
TWP 4FT	30W	120-277V	80	137 lm/W	4,100	4,102	4,105
	35W	120-277V	80	134 lm/W	4,690	4,693	4,697
	40W	120-277V	80	132 lm/W	5,240	5,242	5,246

## ELECTRICAL LOAD

WATTAGE	Current (A)			
	120V	208V	240V	277V
30W	0.25	0.14	0.13	0.11
35W	0.29	0.17	0.15	0.13
40W	0.33	0.19	0.17	0.14

## OPTIONS



### EMERGENCY BACK UP BATTERY (SOLD SEPARATELY)

#### BLD-CM8E

8W Emergency Backup Battery LED Driver

#### BLD-CM15H

15W Emergency Backup Battery LED Driver



### BRI810-B-M10 Motion Sensor (SOLD SEPARATELY)

#### BRI810-B

Microwave Motion Sensor

Rated Voltage: 120-277V

Detection radius/angle: Max 26ft/360°

Mounting height: Max 40ft



Please visit [orelighting.com](http://orelighting.com) to see which products are DLC Listed.

# ORE | INTERIOR

Houston, Texas

| [Sales@orelighting.com](mailto:Sales@orelighting.com)

| 346-874-7955

| [www.orelighting.com](http://www.orelighting.com)

Note: Information contained herein is subject to change without notice.

©2023 ORE Lighting INC. All rights reserved