

Project Name:
Part Number:
Fixture Type
Notes:

UPG Tunable LED Up & Down Canopy Light

FEATURES

The UPG Parking Garage Series offers extended lumen packages that range from 4,200 to 9,000 lumens. Aluminum alloy housing and polycarbonate optical lens. It is well-designed for superior illumination performance in exterior ceiling mount and canopy applications. 4000K / 5000K selectable and power selectable. The UPG has uplight as standard, which effectively reduces "cave" effect. This fixture is ideal for applications ranging from Parking Structures, Storage Areas, Entryways, Low-Level Security Lighting and many building interior and exterior applications.



UPG 28W / 42W / 56W / 70W

APPLICATIONS

Parking Garages, Canopy, Stairwells, Low Bay Installations, etc



REPLACEMENT

100W - 250W MH



ORDERING INFORMATION



EXAMPLE: UPG 28W 4K UNV

Series	Wattage Selectable	CCT Selectable	Finish	Voltage	Options
UPG	28W - 4,326 lm 42W - 5,818 lm 56W - 7,321 lm 70W - 9,080 lm	4K - 4000K 5K - 5000K	BLANK White	UNV 120-277V	BLANK = No Accessories BRI810-B-M8 = Microwave Motion Sensor BLD-CM08E = 8W Emergency Backup Battery 120-277V only BLD-CM15H = 15W Emergency Backup Battery 120-277V only BLD-CM20H = 20W Emergency Backup Battery 120-277V only RC100 = Remote Controller

Accessories & Options



BLD-CM08E



BLD-CM15H



BLD-CM20H



BRI810-C-F



RC100

SPECIFICATIONS

HOUSING

Sealed die-cast aluminum housing.

ELECTRICAL

Standard 120/277V with 50/60Hz.
Standard 1 - 10V dimming

MOUNTING

Surface mount or Pendant mount with conduit.

OPTICS

Polycarbonate optical lens with heat resistance

CCT SELECTABLE

Switch selectable
4000K / 5000K; 80+ CRI

LUMENS SELECTABLE

Selectable lumen packages ranging from
4,200 - 9,000 lm

EFFICACY

Up to 140 lumens per watt

COLOR UNIFORMITY

ORE's range of CCT (Correlated Color Temperature) follows the Chromaticity of Solid-State Lighting (SSL) Products

AMBINET TEMPERATURE

Suitable for use in -40°F to 113°F (-40°C to 45°C)

ENERGY DATA

Power Factor above 90%

IP RATING

Ingress Protection rating of IP65 for dust and water

FINISH

Polyester Powder finish in White for superior corrosion resistance and maximum durability.



GREEN TECHNOLOGY

Mercury and UV-free. RoHS compliant components.
Polyester powder coat finish formulated without the use of VOCs or toxic heavy metals

WARRANTY

5 year limited warranty. Comprehensive warranty terms can be located on www.orelighting.com

DIMENSIONS

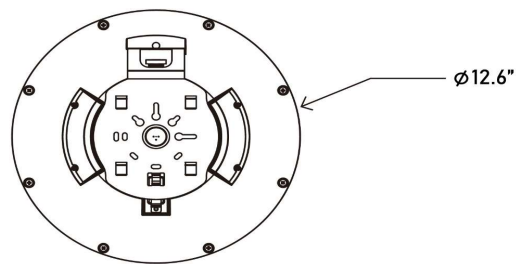

Product	A	B	Weight
UPG	$\varnothing 12.6"$	4.0"	7.1 lbs

ORE LIGHTING

PERFORMANCE DATA

PART NUMBER	WATTAGE	LPW	CRI	VOLTAGE	4000K	5000K
					LUMENS	LUMENS
UPG 28	28W	140 lm/w	70+	120-277V	4,326	4,246
UPG 42	42W	141 lm/w	70+	120-277V	5,818	5,713
UPG 56	56W	143 lm/w	70+	120-277V	7,321	7,137
UPG 70	70W	144 lm/w	70+	120-277V	9,080	8,790

ELECTRICAL LOAD

POWER	WATTAGE	Current (A)			
		120V	208V	240V	277V
40%	28W	0.23	0.13	0.12	0.10
60%	42W	0.35	0.20	0.18	0.15
80%	56W	0.47	0.27	0.23	0.20
100%	70W	0.58	0.34	0.23	0.25

