
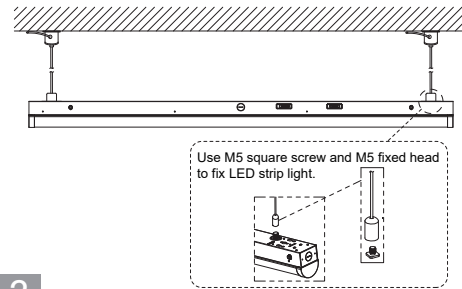


LED Strip Light

C: Suspension cable installation

Adjusting the suspension cable according to the length.



Fix the suspension cable to the holes at both ends of the fixture and adjust the length of the suspension cable.

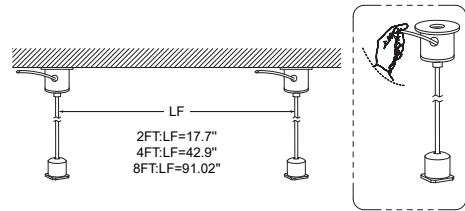

1 2

Turn off the power and wiring by using wire nuts (Figure 1). Insert the terminal block and wires into the lamp housing (Figure 2).



Press upward the cover and lock it.

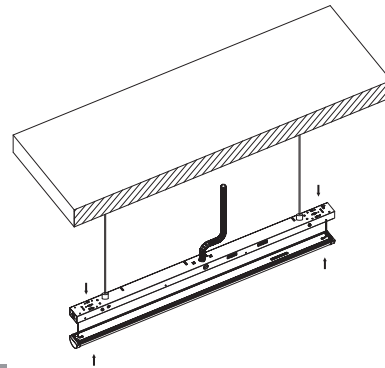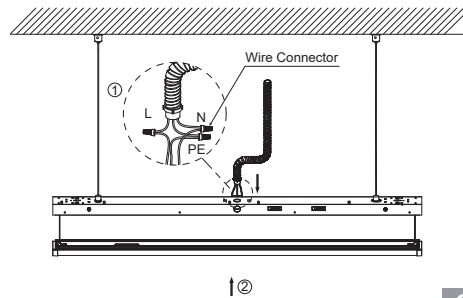

3 4

fixed cap (take out from the accessories bag), 4pcs for 2ft and 4ft, 8pcs for 8ft.

The installation completed.

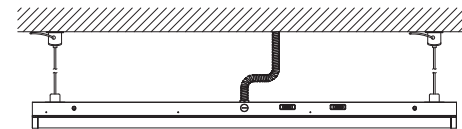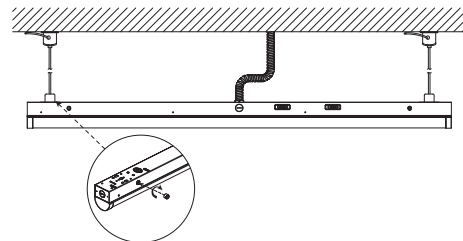

5 6

IMPORTANT CAUTION:

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

WARNING: TURN OFF POWER BEFORE INSTALLATION.

1. Review the diagrams before beginning, and make sure the fixture is grounded properly.
2. This fixture has to be installed or maintained in accordance with the application code by a professional person who is familiar with the construction and operation of the product and the hazards involved.
3. This fixture must be wired in accordance with the international electrical code and applicable local codes and ordinances.
4. Proper grounding is required to ensure personal safety. Carefully observe the correct grounding procedure under the installation section.
5. Check that the voltage is compatible with the fixture driver, and use approved connectors for all electrical connections.
6. Please do not disassemble, repair, or modify the light fixtures without permission. Avoid causing damage to the light fixtures and other undesirable consequences.

MAINTENANCE AND CLEANING:

WARNING: TURN OFF POWER BEFORE MAINTENANCE AND CLEANING.

1. Before touching the fixture, make sure the fixture is cooling.
2. Do not clean or maintain while the fixture is energized.
3. Clean the lens & fixture with a non-abrasive glass cleaning solution.
4. Do not open the fixture to clean and touch LED chips.

WIRING INSTRUCTION:

WIRING INSTRUCTION

WARNING: TURN OFF POWER BEFORE CONNECTING WIRES.

Black wire connect to L, White wire connect to N, Green wire connect to GROUND.

For 0-10V dimming, the wiring direction as below:

1. Turn off the power.
2. Connect the BLACK wire with the LINE.
3. Connect the WHITE wire with the COMMON.
4. Connect the GREEN wire with the GROUND.
- Caution: DO NOT connect the PINK (-) DIM V- wire with GROUND.
5. Connect the PURPLE wire with the 0-10V.
6. Connect the PINK wire with the GND(Sensor).
7. Connect the YELLOW wire with the VCC.


GROUND		GREEN
LINE		BLACK
COMMON		WHITE
0-10V		PURPLE
GND(Sensor)-		PINK
VCC		YELLOW

**LIGHT
FIXTURE**

INSTALLATION:


A: Hook Mount

Fixing the hook and suspending the lamp.

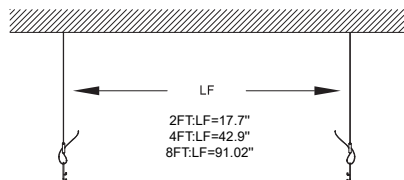


1 2

Attach the V-Clip to holes on each end of the fixture housing (Figure 1). Adjusting the hanging rope length (Figure 2).

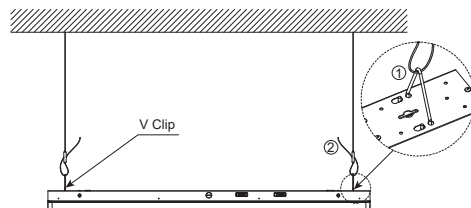


Turn off the power and wiring by using wire nuts (Figure 1). Insert the terminal block and wires into the lamp housing (Figure 2).

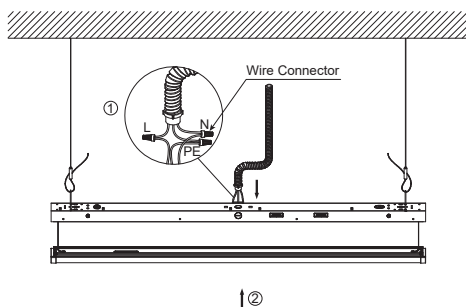


3 4

Press upward the cover and lock it.

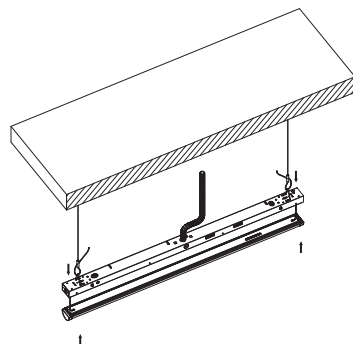


fixed cap (take out from the accessories bag), 4pcs for 2ft and 4ft, 8pcs for 8ft.

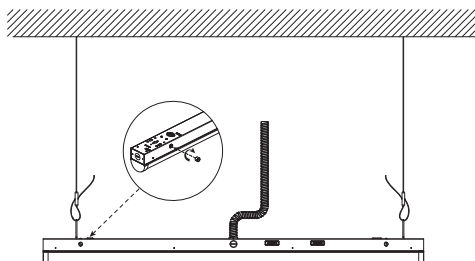


5 6

The installation completed.

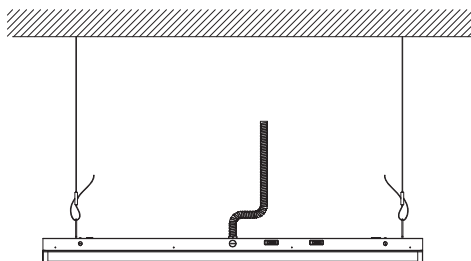


B: Ceiling installation

1. Install the shield
2. Press the snap button to open the PC cover

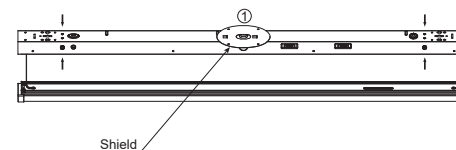


1 2

1. Turn off the power and pass the AC wire through the shield
2. Fix the lamp on the top of the wall with M5 self-tapping screws
3. Connect the AC wire of the power supply to the mains

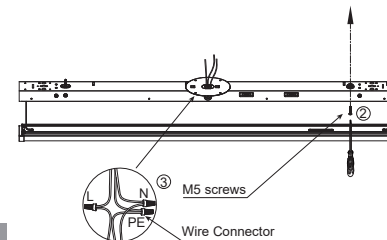


Press upward the cover and lock it

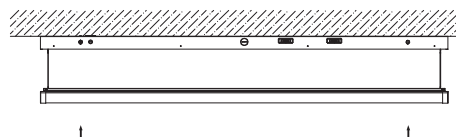


3 4

fixed cap (take out from the accessories bag), 4 pcs for 2ft and 4ft, 8pcs for 8ft.

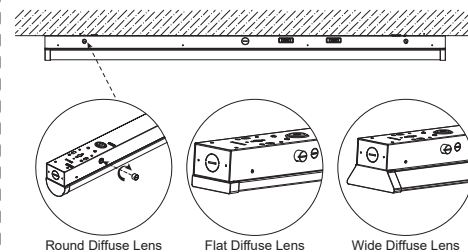

The installation completed.



5