
Installation: \\\\

Motion Sensor Optional (Sold Separately)

- 1. Take out the waterproof cap.
- 12. Screw-in motion sensor.

Note: Turn off the power before you operate.

For more details please kindly check the motion sensor specification.

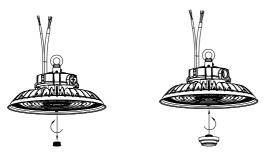


Adjusting power and color temperature


- 1. Flip the color temperature switch to the desired color temperature. 1. 2. Flip the power switch to the desired wattages shown in the figure.



Do not operate with power on.

Please turn off the power when adjusting the power or color temperature.






LED HIGH BAY LIGHT

Installation Instructions





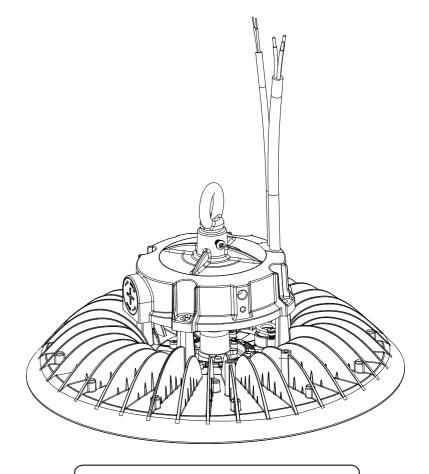

100W/150W/200W/240W/300W

Safety Instruction: \\


- READ CAREFULLY BEFORE INSTALLING FIXTURE.
- PLEASE KEEP THIS MANUAL FOR FUTURE USE.
- FIXTURES MUST BE WIRED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES.
- PROPER GROUNDING IS REQUIRED FOR SAFETY.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICATION CODE BY A PERSON. FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- MAKE CERTAIN THE POWER IS OFF BEFORE INSTALLING OR MAINTAINING THE FIXTURE.
- CHECK IF THE VOLTAGE IS COMPATIBLE WITH THE FIXTURE DRIVER.
- PLEASE USE APPROVED CONNECTORS.

Maintenance Caution: \\\

- 1. Review the picture below before beginning, and make sure the fixture is grounded properly.
- 2. For lighting controls, use functioning correctly.
- 3. Turn the power off and wait for fixture cooling to operate.
- 4. Maintenance must be done by professionals.

Wire Connection: \\\\

- 1. Universal voltage driver permits operation at 120-277V, 120-347V, 277-480V, 50/60HZ.
- 2. Universal voltage driver permits operation at 120-277V, 120-347V, 277-480V, 50/60HZ with dimming microwave motion sensor.

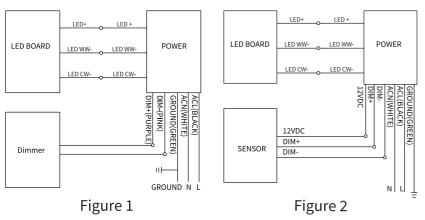

Installation Instruction:

Ceiling with Loop	Ceiling with Hook
1. Fix the luminaire with a chain to the ceiling; 2. Use the buckles to fix safety rope with the body and loop; 3. Connect the wires. Input wire Set Screw Set Screw	1.Unscrew the hook, fix the luminaire to the

Pendant Mounting 1. Fix the luminaire with bar and tighten the pole with an anti-skid screw; 2. Use the buckles to fix the safety rope with the lampbody and ceiling; 3. Connect the wires. 1. Trepan the installation holes as the size of the following figure; 2. Use screws to tighten the luminaire. The holder can be adjusted from 60D to 120D; 3. Use the buckles to fix the safety rope with the body and loop. 4. Connect the wires. Safety Rope Bracket Safety Rope