




Project Name:

Part Number:

Fixture Type:

VALA R1 Series Selectable Architectural Linear Light

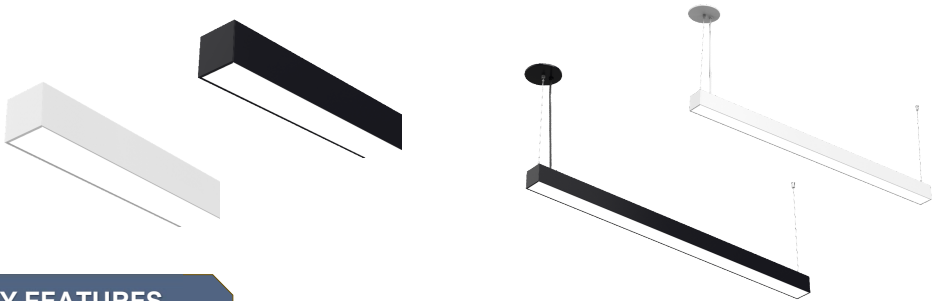

KEY FEATURES

- 5 CCT and 5 Wattages Selectable offer SKU reduction. Control CCT of downlight and uplight individually or both.
- Up & Down lighting distribution switchable, down only, Up only, or both Down & Up lights.
- The buckle bracket splice makes a gapless linkable and easy connection without any tools.
- Pendant mounting, surface mounting, and wall mounting standard.
- Sensor and emergency battery backup are available.
- Unique end cap simplifies installation, seamless continuous runs, or individuals.

ORDERING INFORMATION



EXAMPLE: VALA R1 4FT 50W LCS TD WT UNV

Series	Width	Length	Wattage Selectable	CCT Selectable	Distribution	Finish	Voltage
VALA R1 Architectural Linear Light	R1 2.6 inch	4FT - 4 feet	25W	LCS	TD Selectable Up / Down Light Distributions 100% up light 70% down / 30% up 50% down / 50% up 30% down / 70% up 100% down light	WT White BK *Black	UNV 120-277V
		8FT - 8 feet	30W 35W 40W 50W	3000K 3500K 4000K 5000K 6500K			
		*Connected	40W 50W 60W 70W 80W				

\*Black: Black finish - consult factory for availability

\*Connected: 120V continuous run up to 40FT. 277V continuous run up to 100FT. In increments of 4'. The fixture lengths come in 4' and 8'

For stocking opportunities, please contact your local ORE Lighting rep or sales@orelighting.com. Lead times may vary based on current inventory levels - always consult your local ORE Lighting rep for lead times and project needs.

ACCESSORIES

Mounting Kits	Joiner	Emergency Backup	Options
DCA Drywall Ceiling Kit (Round / Square)	VAR1CS - Straight Joiner VAR1CS - L L Joiner VAR1CS - T T Joiner VAR1CS - X X Joiner	EMY 4W emergency back up battery for 4ft EMB08UY 8W emergency back up battery for 8ft	MMS Microwave motion sensor

\*\*Accessories & Options must be ordered separately. \*Offer two original color options: Black and White.

Accessories shown are generally stocked items; for additional accessory questions and options, please contact your local ORE Lighting rep or email sales@orelighting.com. Options for spec needs are available through a special request - please contact sales@orelighting.com with spec needs and project size.

## SPECIFICATIONS

### CCT & CRI

Switch selectable  
30K / 35K / 40K / 50K / 65K; CRI > 80+

### AMBINET TEMPERATURE

Suitable for use in -4°F to 113°F (-20°C to 45°C)

### EFFICACY

Up to 125 lumens per watt

### HOUSING

Extruded aluminum housing with powder coat finish

### MOUNTING

Pendant: Aircraft cable provided with cable grippers for easy adjustment after installation  
Surface: For direct ceiling mounting  
Wall: For direct wall mounting  
Recessed: Compatible with dry ceilings

### LIFESPAN

Above 50,000 – hour LED lifespan based on IES LM-80 results and TM-21 calculations.

### ELECTRICAL

Standard 120V - 277V - 6' suspended power cord  
0-10V dimming standard with a dimming range of 100% to 10%. Power Factor > 0.9

### SURGE POTECTION

L-N: 2.5KV  
L&N-PE: 2.5KV

### CERTIFICATIONS

UL Listed. FCC compliant.  
IP Rating - IP20



### WARRANTY

5 year limited warranty. Comprehensive warranty terms can be located on [www.orelighting.com](http://www.orelighting.com)


## DIMENSIONS

unit: mm / inch

### VALA R1 - 4 feet



### VALA R1 - 8 feet




### CCT Switchable

3000/3500/4000/5000/6500K

### Wattage Switchable

4FT: 25/30/35/40/50W  
8FT: 24/40/50/60/80W

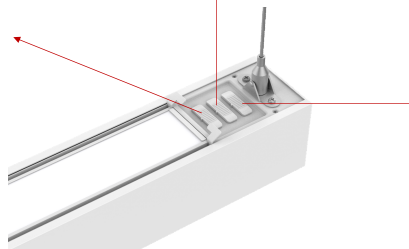

### Adjustable Light Distribution


- ① UP: 100% & DOWN: 0%
- ② UP: 70% & DOWN: 30%
- ③ UP: 50% & DOWN: 50%
- ④ UP: 30% & DOWN: 70%
- ⑤ UP: 0% & DOWN: 100%

## OPTIONS


SOLD SEPARATELY



**VAR1CS-**  
Straight Joiner



**VAR1CS-L**  
L Joiner



**VAR1CS-T**  
T Joiner



**VAR1CS-X**  
X Joiner



**RLC**  
Cuttable Flexible Cover



**DCA**  
Square Ceiling Kit



**DCA**  
Round Ceiling Kit



**RDK**  
Recessed Mount Kit




**SMA**  
Surface Mount Kit



**WB**  
Wall Mount Kit

## MOUNTING


**Drywall Ceiling**

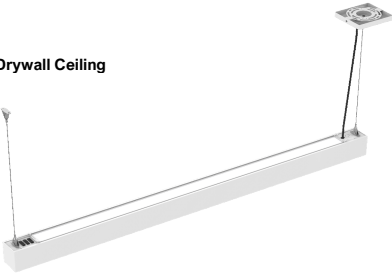

**Wall Mount**



**Surface Mount**

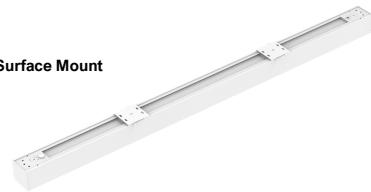

**Recessed Mount**



**Internal Joiner**



Houston, Texas

[Sales@orelighting.com](mailto:Sales@orelighting.com)

346-874-7955

[www.orelighting.com](http://www.orelighting.com)

Note: Information contained herein is subject to change without notice.  
©2025 ORE Lighting INC. All rights reserved

3203 S Sam Houston Pkwy E, # 100, Houston, TX 77047  
Updated date: 06/12/2025