

WPLM1 Series Selectable Mini Wall Pack Light

KEY FEATURES

- 5CCT(27/30/35/40/50K) selectable to save SKU
- Driver-on-board design, highly cost-effective
- Excellent optical structure design to reduce light pollution caused by glare
- Novel appearance design with a wet location rating of IP65
- Efficacy up to 120lm/W

CONSTRUCTION

High-strength, heat-resistant polycarbonate housing

AMBINET TEMPERATURE

Suitable for use in -40°F to 113°F (-40°C to 45°C)


CCT SELECTABLE

Switch selectable

2700K/3000K/3500K/4000K/5000K; 80+ CRI

CERTIFICATIONS

ETL Listed, IP 65, and IK08



EFFICACY

Up to 120 lumens per watt

WARRANTY

5 year limited warranty. Comprehensive warranty terms can be located on www.orelighting.com


ORDERING INFORMATION



EXAMPLE: **WPLM1 20W LCS 120 T PCTM**



Series	Wattage	CCT Selectable	Finish	Voltage	DIM	Beam	Photocell
WPLM1 Wall Pack Light	20W 2400 lm	LCS 2700K 3000K 3500K 4000K 5000K	BLANK Bronze	120 AV 120V	T Triac	BLANK 100°	PCTM Dip Switch Photocell (Default)

For stocking opportunities, please contact your local ORE Lighting rep or sales@orelighting.com. Lead times may vary based on current inventory levels - always consult your local ORE Lighting rep for lead times and project needs.

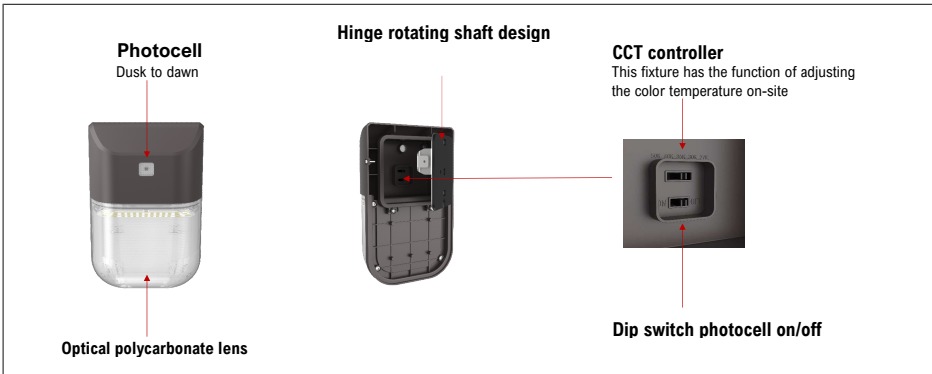

DIMENSIONS

unit: mm / inch



Net Weight
1.38 lbs

20W

