



Project Name: _____
Part Number: _____
Fixture Type: _____

WPLM2 Series Selectable Mini Wall Pack Light

KEY FEATURES

- 3CCT(30/40/50K) and 3 Wattages selectable to save SKU
- Driver-on-board design, highly cost-effective
- Excellent optical structure design to reduce light pollution caused by glare
- Novel appearance design with a wet location rating of IP65
- Efficacy up to 130lm/W



CONSTRUCTION

Durable die cast aluminum housing

AMBINET TEMPERATURE

Suitable for use in -40°F to 122°F (-40°C to 50°C)

CCT SELECTABLE

Switch selectable

3000K/4000K/5000K; 80+ CRI

CERTIFICATIONS

ETL Listed, IP 65

EFFICACY

Up to 130 lumens per watt

WARRANTY

5 year limited warranty. Comprehensive warranty terms can be located on www.orelighting.com




ORDERING INFORMATION



EXAMPLE: **WPLM2 30W LCS UNV D PCTM**


Series	Wattage	CCT Selectable	Finish	Voltage	DIM	Beam	Photocell
WPLM2 Wall Pack Light	15W - 1950 lm 20W - 2600 lm 30W - 3900 lm	LCS 3000K 4000K 5000K	BLANK Bronze	UNV 120V - 277V	D 0-10V	BLANK 100°	PCTM Dip Switch Photocell (Default)

For stocking opportunities, please contact your local ORE Lighting rep or sales@orelighting.com. Lead times may vary based on current inventory levels - always consult your local ORE Lighting rep for lead times and project needs.

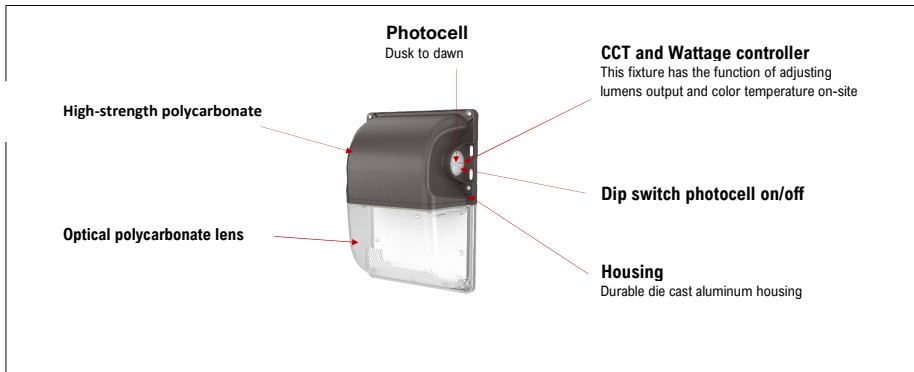

DIMENSIONS

unit: mm / inch



Net Weight
1.47 lbs

30W

