

BLR1 Series Selectable Bollard Light



KEY FEATURES

- 3CCT(3000/4000/5000K) and 3 Wattages Selectable offer SKU reduction
- Die-cast aluminum housing provides excellent heat dissipation
- AC120-277V & High efficacy up to 120 lm/W
- Wet location rated IP65

CONSTRUCTION

Die-cast aluminum housing with polyester powder paint

AMBINET TEMPERATURE

Suitable for use in -40°F to 113°F (-40°C to 45°C)

CCT SELECTABLE

Switch selectable
3000K/4000K/5000K; CRI > 70+

LUMENS SELECTABLE

Selectable lumen packages ranging from 1,440 to 2,880 lm

LIFESPAN

Estimated 50,000 – hour LED lifespan based on IES LM-80 results and TM-21 calculations.

EFFICACY

Up to 120 lumens per watt

CERTIFICATIONS

UL Listed, IP 65, and IK10

WARRANTY

5 year limited warranty. Comprehensive warranty terms can be located on www.orelighting.com

ORDERING INFORMATION




EXAMPLE: BLR1 24W LCS BZ UNV R4 T5

Series	Wattage Selectable	CCT Selectable	Finish	Voltage	Size	Beam
BLR1 Bollard Light	12W - 1440 lm 18W - 2160 lm 24W - 2880 lm	LCS 3000K 4000K 5000K	BZ Dark Bronze RP* Custom Color	UNV 120-277V	R4 42" Height	T5 type V

*For custom color, please contact regional sales for details.

For stocking opportunities, please contact your local ORE Lighting rep or sales@orelighting.com. Lead times may vary based on current inventory levels - always consult your local ORE Lighting rep for lead times and project needs.

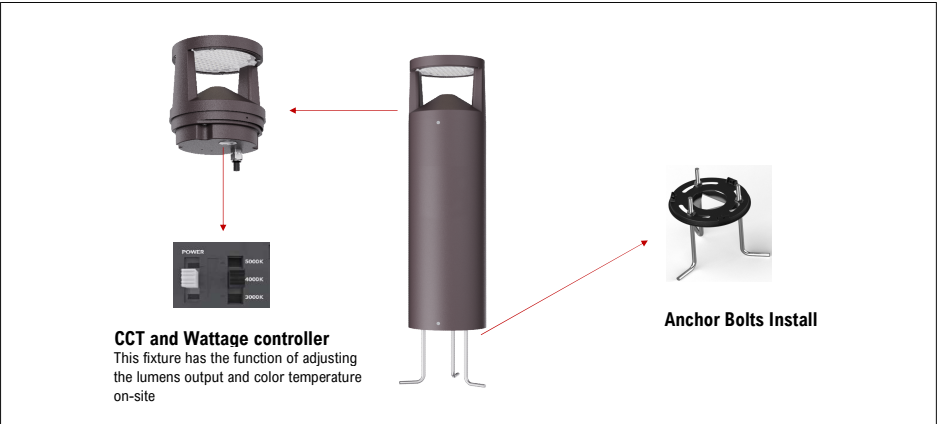

DIMENSIONS

unit: mm / inch



PERFORMANCE DATA

PART NUMBER	POWER	WATTAGE	3000K		4000K		5000K	
			LUMENS	EFFICACY	LUMENS	EFFICACY	LUMENS	EFFICACY
BLR1 24	60%	12W	1,440	120 lm/w	1,440	120 lm/w	1,452	121 lm/w
	80%	18W	2,160	120 lm/w	2,160	120 lm/w	2,178	121 lm/w
	100%	24W	2,880	120 lm/w	2,880	120 lm/w	2,904	121 lm/w

ELECTRICAL LOAD

PART NUMBER	WATTAGE	Current (A)			
		120V	208V	240V	277V
BLR1 24	12W	0.10	0.05	0.05	0.04
	18W	0.15	0.08	0.07	0.06
	24W	0.20	0.11	0.10	0.08

