



Project Name:

Part Number:

Fixture Type:

LHBR2 Series Selectable Linear High Bay Light




1.5FT



2FT

KEY FEATURES

- 3CCT(3000K/4000K/5000K) and 5 Wattages Selectable offer SKU reduction.
- Dual lens rotates 135 degrees upward.
- Microwave / PIR motion sensor and Emergency battery backup available.
- Standard V-hooks accessory for chain pendant and suspended mounting, additional surface mounting is available.
- AC120-277V & 277-480V high efficacy up to 150LM/W.

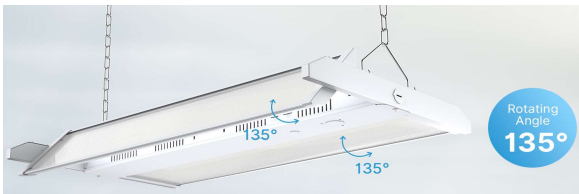

ORDERING INFORMATION



EXAMPLE: LHBR2 110W LCS UNV					
Series	Wattage Selectable	CCT Selectable	Finish	Voltage	Options
LHBR2 Linear High Bay Light	50W - 7500 lm	LCS 3000K 4000K 5000K	BLANK White	UNV 120-277V 480 277-480V	Blank No Accessories
	60W - 39000 lm				MMS Microwave motion sensor
	70W - 10500 lm				MPS PIR motion sensor
	90W - 13500 lm				SMK Surface mounting kits
	110W - 16500 lm	165W - 24750 lm			CPM Conduit pendant mounting kits
	90W - 13500 lm				EBU 40W Emergency Battery Backup for 120-277V
	110W - 16500 lm				EBH 40W Emergency Battery Backup for 277-480V
	130W - 19500 lm				
	150W - 22500 lm	165W - 24750 lm			
	165W - 24750 lm				
	150W - 22500 lm				
	165W - 24750 lm				
	180W - 27000 lm	220W - 33000 lm			
	200W - 30000 lm				
	220W - 33000 lm				
	165W - 24750 lm				
	220W - 33000 lm	220W - 33000 lm			
	255W - 38250 lm				
	275W - 41250 lm				
	300W - 45000 lm				

**Accessories & Options must order separately.

For stocking opportunities, please contact your local ORE Lighting rep or sales@orelighting.com. Lead times may vary based on current inventory levels - always consult your local ORE Lighting rep for lead times and project needs.

ACCESSORIES

MMS/MPS ANT microwave/PIR (Sold separately)	EBU 40W 6000 lm 90 min (Sold separately)	EBH 40W 6000 lm 90 min (Sold separately)	SMK Surface mount (Sold separately)	CPM Conduit pendant (Sold separately)

Accessories shown are generally stocked items; for additional accessory questions and options, please contact your local ORE Lighting rep or email sales@orelighting.com. Options for spec needs are available through a special request - please contact sales@orelighting.com with spec needs and project size.

SPECIFICATIONS

CONSTRUCTION

The rugged, one-piece die-cast aluminum housing features a rock-solid quality and performance.

ELECTRICAL

Standard 50/60Hz operation with 120/277V input
0-10V dimming standard for a dimming range of 100% to 10%. 277-480V available

OPTICS

Prismatic translucent lens is designed to shape the light uniformity and controls the glare light
Dual lens rotates 135 degrees upward.

CCT SELECTABLE

Switch selectable
3000K / 4000K / 5000K

LUMENS SELECTABLE

Selectable lumen packages ranging from 7,500 to 45,000 lm

EFFICACY

Up to 150 lumens per watt.

MOUNTING

Steel wire rope mount (default)
Surface mount
Conduit pendant mount

LIFESPAN

Estimated 50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

AMBINET TEMPERATURE

Suitable for use in -40°F to 122°F (-40°C to 50°C)

FINISH

White Polyester Powder coat with 88% reflectivity, painted after fabrication.

CERTIFICATIONS


UL damp location listed

WARRANTY


5 year limited warranty. Comprehensive warranty terms can be located on www.orelighting.com

DIMENSIONS


unit: mm / inch




1.5FT 110W



2FT 165W




2FT 220W & 300W



Product	L	W	H	Weight
LHBR2 110W	15.8	12.2	1.5	4.2 lbs
LHBR2 165W	24.8	12.2	1.5	6.4 lbs
LHBR2 220W	24.8	14.6	1.5	7.9 lbs
LHBR2 300W	24.8	14.6	1.5	7.9 lbs



The LHBR2 includes a sensor port that makes it easy to screw on standard PIR and microwave sensors, which can be configured to adjust brightness and hold time, saving additional energy costs.



Plug-and-play PIR / Microwave sensor 12 - 24VDC



Chain Mount



Surface Mount



Pendant Mount

Houston, Texas

Sales@orelighting.com

346-874-7955

www.orelighting.com

Note: Information contained herein is subject to change without notice.

3203 S Sam Houston Pkwy E, # 100, Houston, TX 77047

©2025 ORE Lighting INC. All rights reserved

Updated date: 07/02/2025

PERFORMANCE DATA

		3000K	4000K	5000K
PART NUMBER	WATTAGE	EFFICACY	LUMENS	
LHBR2 110W	50W / 60W / 70W / 90W / 110W	155 lm/W	7500 lm / 9000 lm / 10500 lm / 13500 lm / 16500 lm	
LHBR2 165W	90W / 110W / 130W / 150W / 165W	163 lm/W	13500 lm / 16500 lm / 19500 lm / 22500 lm / 24750 lm	
LHBR2 220W	150W / 165W / 180W / 200W / 220W	167 lm/W	22500 lm / 24750 lm / 27000 lm / 30000 lm / 33000 lm	
LHBR2 300W	165W / 220W 255W / 275W / 300W	171 lm/W	24750 lm / 33000 lm / 38250 lm / 41250 lm / 45000 lm	

ELECTRICAL LOAD

PART NUMBER	WATTAGE	Current (A)					
		120V	208V	240V	277V	347V	480V
LHBR2 110W	50W	0.42	0.24	0.2	0.18	0.14	0.1
	60W	0.5	0.28	0.25	0.21	0.17	0.12
	70W	0.58	0.33	0.29	0.25	0.2	0.14
	90W	0.75	0.43	0.37	0.32	0.25	0.18
	110W	0.92	0.52	0.45	0.39	0.31	0.22
LHBR2 165W	90W	0.75	0.43	0.37	0.32	0.25	0.18
	110W	0.92	0.52	0.45	0.39	0.31	0.22
	130W	1.08	0.62	0.54	0.46	0.37	0.27
	150W	1.25	0.72	0.62	0.54	0.43	0.31
	165W	1.37	0.79	0.68	0.59	0.47	0.34
LHBR2 220W	150W	1.25	0.72	0.62	0.54	0.43	0.31
	165W	1.37	0.79	0.68	0.59	0.47	0.34
	180W	1.5	0.86	0.75	0.64	0.51	0.37
	200W	1.67	0.96	0.83	0.72	0.57	0.41
	220W	1.83	0.99	0.91	0.79	0.63	0.45
LHBR2 300W	165W	1.37	0.79	0.68	0.59	0.47	0.34
	220W	1.83	1.05	0.91	0.79	0.63	0.45
	255W	2.12	1.22	1.06	0.92	0.73	0.53
	275W	2.29	1.32	1.14	0.99	0.79	0.57
	300W	2.5	1.44	1.25	1.08	0.86	0.62

