



Project Name:  
Part Number:  
Fixture Type:

## BLR2 Series Selectable Bollard Light



### KEY FEATURES

- 3CCT(3000/4000/5000K) and 3 Wattages Selectable offer SKU reduction
- 3-in-1 switch buttons, CCT Selectable & Power Adjustable & Photocell On/Off
- Cone reflector, Louvered reflector and Decorative different shapes
- Die-cast aluminum housing provides excellent heat dissipation
- AC120-277V & High efficacy up to 140 lm/W
- Wet location rated IP65

#### CONSTRUCTION

Die-cast aluminum housing with polyester powder paint

#### AMBIENT TEMPERATURE

Suitable for use in -40°F to 122°F (-40°C to 50°C)

#### CCT SELECTABLE

Switch selectable  
3000K/4000K/5000K; CRI > 80+

#### LUMENS SELECTABLE

Selectable lumen packages ranging from 1,960 to 3,360 lm

#### EFFICACY

Up to 140 lumens per watt

#### LIFESPAN

Estimated 50,000 – hour LED lifespan based on IES LM-80 results and TM-21 calculations.

#### MOUNTING

Include anchor bolts

#### SURGE PROTECTION

L/N 4KV, L/N-P 4KV  
L/N 1KV, L/N-P 2KV (EM)

#### CERTIFICATIONS

UL Listed, IP 65, and IK08

#### WARRANTY

5 year limited warranty. Comprehensive warranty terms can be located on [www.orelighting.com](http://www.orelighting.com)

### ORDERING INFORMATION



EXAMPLE: BLR2 24W LCS BZ UNV

Series	Wattage Selectable	CCT Selectable	Top Shape	Finish	Voltage	Options
BLR2 Bollard Light	14W - 1960 lm 19W - 2660 lm 24W - 3360 lm	LCS 3000K 4000K 5000K	A - flat head B - dome head C - louver flat head D - louver dome head E - decorative head	BZ Dark Bronze RP* Custom Color	120-277V	Blank No accessories PCTM Intergrated Photocell (default) HS 180° spill shield only for flat, dome, and louver head RP Retrofit plate


\*For custom color, please contact regional sales for details.

For stocking opportunities, please contact your local ORE Lighting rep or [sales@orelighting.com](mailto:sales@orelighting.com). Lead times may vary based on current inventory levels - always consult your local ORE Lighting rep for lead times and project needs.



## DIMENSIONS

unit: mm / inch

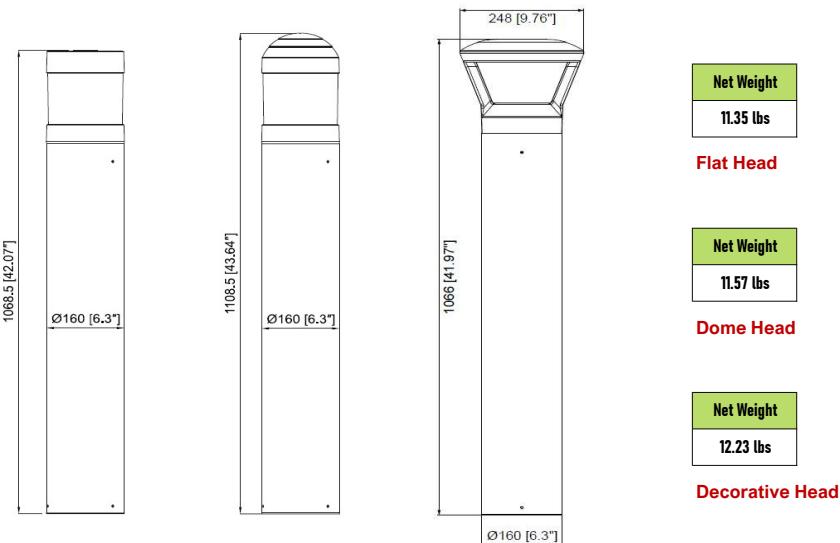

Net Weight

11.35 lbs

Flat Head

Net Weight

11.57 lbs

Dome Head

Net Weight

12.23 lbs

Decorative Head

## PERFORMANCE DATA

PART NUMBER	POWER	WATTAGE	3000K		4000K		5000K	
			LUMENS	EFFICACY	LUMENS	EFFICACY	LUMENS	EFFICACY
BLR2 24	60%	14W	1,960	140 lm/w	1,960	140 lm/w	1,974	141 lm/w
	80%	19W	2,660	140 lm/w	2,660	140 lm/w	2,679	141 lm/w
	100%	24W	3,360	140 lm/w	3,360	140 lm/w	3,384	141 lm/w

## ELECTRICAL LOAD

PART NUMBER	WATTAGE	Current (A)			
		120V	208V	240V	277V
BLR2 24	14W	0.10	0.05	0.05	0.04
	19W	0.15	0.08	0.07	0.06
	24W	0.20	0.11	0.10	0.08



Houston, Texas

Sales@orelighting.com

Note: Information contained herein is subject to change without notice.  
©2025 ORE Lighting INC. All rights reserved

346-874-7955

3203 S Sam Houston Pkwy E, # 100, Houston, TX 77047  
Updated date: 11/13/2025

www.orelighting.com