

BLR2 Series Selectable Bollard Light



KEY FEATURES

- 3CCT(3000/4000/5000K) and 3 Wattages Selectable offer SKU reduction
- 3-in-1 switch buttons, CCT Selectable & Power Adjustable & Photocell On/Off
- Cone reflector, Louvered reflector and Decorative different shapes
- Die-cast aluminum housing provides excellent heat dissipation
- AC120-277V & High efficacy up to 140 lm/W
- Wet location rated IP65

CONSTRUCTION

Die-cast aluminum housing with polyester powder paint

AMBINET TEMPERATURE

Suitable for use in -40°F to 122°F (-40°C to 50°C)

CCT SELECTABLE

Switch selectable
3000K/4000K/5000K; CRI > 80+

LUMENS SELECTABLE

Selectable lumen packages ranging from 1,960 to 3,360 lm

EFFICACY

Up to 140 lumens per watt

LIFESPAN

Estimated 50,000 – hour LED lifespan based on IES LM-80 results and TM-21 calculations.

MOUNTING

Include anchor bolts

SURGE PROTECTION

L/N 4KV, L/N-P 4KV
L/N 1KV, L/N-P 2KV (EM)

CERTIFICATIONS

UL Listed, IP 65, and IK08

WARRANTY

5 year limited warranty. Comprehensive warranty terms can be located on www.orelighting.com

ORDERING INFORMATION



EXAMPLE: BLR2 24W LCS BZ UNV

Series	Wattage Selectable	CCT Selectable	Top Shape	Finish	Voltage	Options
BLR2 Bollard Light	14W - 1960 lm	LCS 3000K 4000K 5000K	A - flat head	BZ Dark Bronze RP* Custom Color	UNV 120-277V	Blank
	19W - 2660 lm		B - dome head			No accessories
	24W - 3360 lm		C - louver flat head			HS 180° spill shield only for flat ,dome, and louver head
			D - louver dome head			RP Retrofit plate
			E - decorative head			


*For custom color, please contact regional sales for details.

For stocking opportunities, please contact your local ORE Lighting rep or sales@orelighting.com. Lead times may vary based on current inventory levels - always consult your local ORE Lighting rep for lead times and project needs.



DIMENSIONS

unit: mm / inch

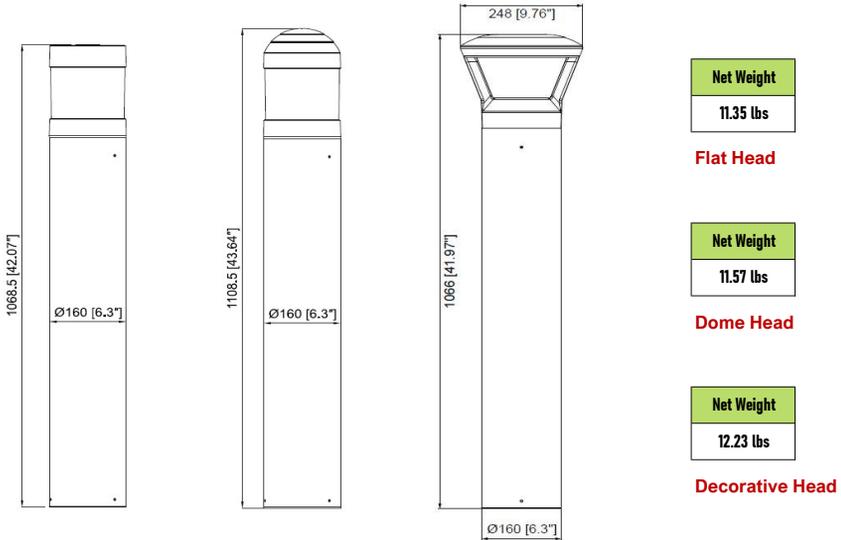

PERFORMANCE DATA

PART NUMBER	POWER	WATTAGE	3000K		4000K		5000K	
			LUMENS	EFFICACY	LUMENS	EFFICACY	LUMENS	EFFICACY
BLR2 24	60%	14W	1,960	140 lm/w	1,960	140 lm/w	1,974	141 lm/w
	80%	19W	2,660	140 lm/w	2,660	140 lm/w	2,679	141 lm/w
	100%	24W	3,360	140 lm/w	3,360	140 lm/w	3,384	141 lm/w

ELECTRICAL LOAD

PART NUMBER	WATTAGE	Current (A)			
		120V	208V	240V	277V
BLR2 24	14W	0.10	0.05	0.05	0.04
	19W	0.15	0.08	0.07	0.06
	24W	0.20	0.11	0.10	0.08

