

WPT Series Selectable Slim Wall Pack Light



KEY FEATURES

- 3CCT(3000/4000/5000K) and 4 Wattages Selectable offer SKU reduction
- ADC12 Aluminum die-casting housing provides excellent heat dissipation and IK08 rate
- Microwave motion sensor and emergency driver available
- Automated Dusk to Dawn photocell functionality.
- Anti-yellow borosilicate prismatic glass lens
- AC120-277V & High efficacy up to 140 lm/W
- Wet location rated IP65

ORDERING INFORMATION



EXAMPLE: **WPT 40W LCS BZ UNV**

Series	Wattage Selectable	CCT Selectable	Finish	Voltage	Options
WPT Slim Wall Pack Light	10W - 1400 lm	LCS 3000K 4000K 5000K	BZ Dark Bronze RP* Custom Color	UNV 120-277V	Blank No Accessories PCTM Intergrated Photocell MMS Microwave motion sensor EB4 Emergency Battery Backup 4W
	20W - 2800 lm				
	30W - 4200 lm				
	40W - 5600 lm				
	40W - 5600 lm	60W - 8400 lm 80W - 11200 lm 100W - 14000 lm 120W - 16800 lm			
	50W - 7000 lm				
	60W - 8400 lm				
	60W - 8400 lm	80W - 11200 lm 100W - 14000 lm 120W - 16800 lm			
	80W - 11200 lm				
	100W - 14000 lm				
	100W - 14000 lm	120W - 16800 lm			
	120W - 16800 lm				

*For custom color, please contact regional sales for details. **Accessories & Options must order separately.

For stocking opportunities, please contact your local ORE Lighting rep or sales@orelighting.com. Lead times may vary based on current inventory levels - always consult your local ORE Lighting rep for lead times and project needs.

ACCESSORIES

		
MPS Microwave sensor (Sold separately)	PCTM Intergrated Photocell (Default)	EB4 4W 600 lm 90 min (Sold separately)



OFFERING 4 WATTAGE AND 3 CCT
FIELD SELECTABLE
MEETS YOUR VARIOUS NEEDS



Accessories shown are generally stocked items; for additional accessory questions and options, please contact your local ORE Lighting rep or email sales@orelighting.com. Options for spec needs are available through a special request - please contact sales@orelighting.com with spec needs and project size.

Houston, Texas

Sales@orelighting.com

346-874-7955

www.orelighting.com

Note: Information contained herein is subject to change without notice.

3203 S Sam Houston Pkwy E, # 100, Houston, TX 77047

©2025 ORE Lighting INC. All rights reserved

Updated date: 12/08/2025



SPECIFICATIONS

CONSTRUCTION

ADC12 cast-aluminum housing with bronze polyester powder paint for outdoor applications. Casting thermally conducts LED heat to optimize performance and long life.

ELECTRICAL

Standard 50/60Hz operation with 120/277V input
0-10V dimming standard for a dimming range of 100% to 10%.

OPTICS

Borosilicate prismatic glass lens provide outstanding performance, uniformity and glare control.

CCT SELECTABLE

Switch selectable
3000K / 4000K / 5000K; CRI > 70+

LUMENS SELECTABLE

Selectable lumen packages ranging from 1,400 to 16,800 lm

EFFICACY

Up to 140 lumens per watt

AMBINET TEMPERATURE

Suitable for use in -40°F to 113°F (-40°C to 45°C)

SURGE PROTECTION

L/N 6KV, L/N-P 6KV

MOUNTING

Wall mount with five 1/2" knockouts

LIFESPAN

Estimated 50,000 – hour LED lifespan based on IES LM-80 results and TM-21 calculations.

FINISH

Polyester Powder Dark Bronze finish. Custom colors available. Multiple stage process to produce 3 mil thickness for superior corrosion resistance and maximum durability.

CERTIFICATIONS


UL Listed for wet locations. Equivalent to IP65 rating

WARRANTY

5 year limited warranty. Comprehensive warranty terms can be located on www.orelighting.com

DIMENSIONS

unit: mm / inch

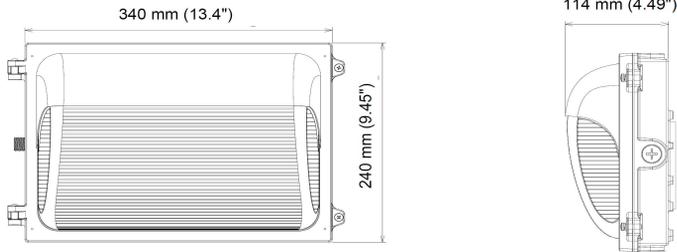

Net Weight

WPT 40W	7.47 lbs
WPT 80W	7.69 lbs
WPT 120W	9.08 lbs



Houston, Texas | Sales@orelighting.com |
Note: Information contained herein is subject to change without notice.
©2025 ORE Lighting INC. All rights reserved

346-874-7955 | www.orelighting.com
3203 S Sam Houston Pkwy E, # 100, Houston, TX 77047
Updated date: 12/08/2025

PERFORMANCE DATA

PART NUMBER	POWER	WATTAGE	3000K		4000K		5000K	
			LUMENS	EFFICACY	LUMENS	EFFICACY	LUMENS	EFFICACY
WPT 40	40%	10W	1,400	140 lm/w	1,400	140 lm/w	1,410	141 lm/w
	60%	20W	2,800	140 lm/w	2,800	140 lm/w	2,820	141 lm/w
	80%	30W	4,200	140 lm/w	4,200	140 lm/w	1,230	141 lm/w
	100%	40W	5,600	140 lm/w	5,600	140 lm/w	5,640	141 lm/w
WPT 80	40%	40W	5,600	140 lm/w	5,600	140 lm/w	5,640	141 lm/w
	60%	50W	7,000	140 lm/w	7,000	140 lm/w	7,050	141 lm/w
	80%	60W	8,400	140 lm/w	8,400	140 lm/w	8,460	141 lm/w
	100%	80W	11,200	140 lm/w	11,200	140 lm/w	11,280	141 lm/w
WPT 120	40%	60W	8,400	140 lm/w	8,400	140 lm/w	8,460	141 lm/w
	60%	80W	11,200	140 lm/w	11,200	140 lm/w	11,280	141 lm/w
	80%	100W	14,000	140 lm/w	14,000	140 lm/w	14,100	141 lm/w
	100%	120W	16,800	140 lm/w	16,800	140 lm/w	16,920	141 lm/w

ELECTRICAL LOAD

PART NUMBER	WATTAGE	Current (A)			
		120V	208V	240V	277V
WPT 40W	10W	0.08	0.04	0.04	0.03
	20W	0.16	0.09	0.08	0.07
	30W	0.25	0.14	0.12	0.10
	40W	0.33	0.19	0.16	0.14
WPT 80W	40W	0.33	0.19	0.16	0.14
	50W	0.42	0.24	0.21	0.18
	60W	0.50	0.28	0.25	0.21
	80W	0.66	0.66	0.33	0.28
WPT 120W	60W	0.50	0.28	0.25	0.21
	80W	0.66	0.66	0.33	0.28
	100W	0.83	0.48	0.42	0.36
	120W	1.00	0.57	0.50	0.43

